

# P

SERIES



# SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units.  
Easily construct a system that best matches room air conditioning needs.

## STEP 1

## SELECT INDOOR UNIT

Select the optimum indoor unit and capacity based on room size and shape.



4-way ceiling-cassette  
PLA-ZRP BA  
PLA-RP BA



Ceiling-concealed  
PEAD-JA(L)Q



Floor-standing  
PSA-KA



Ceiling-suspended  
PCA-KAQ



Professional Kitchen  
PCA-HAQ



Wall-mounted  
PKA-HAL



Wall-mounted  
PKA-KAL



Ceiling-concealed  
PEA-GAQ

## STEP 2

## SELECT OUTDOOR UNIT

The best outdoor unit for the system depends on the combination of functions desired (e.g. energy savings, system capacity, long pipe length).  
Check the specifications of the system you need, and then select the optimum outdoor unit series.

### Power Inverter



PUHZ-ZRP100/125/140/200/250



PUHZ-ZRP60/71



PUHZ-ZRP35/50

### Standard Inverter



PUHZ-P200/250



PUHZ-P125/140



PUHZ-P100



SUZ-KA50/60/71\*



SUZ-KA35\*

\* Some indoor units cannot be used with this unit.

To confirm compatibility with the MXZ Series, refer to the MXZ Series page.

## STEP 3

## SELECT COMBINATION

Choose the installation pattern for the indoor units. (In the case of a multi-system, distribution piping is necessary, so please select the necessary piping as well.)

### Single System




### Simultaneous Multi-System


**Twin** Allows simultaneous operation of two indoor units on one floor.



**Triple** Can cover a large-scale space or dispersed installation on the same floor.



**Quadruple** Realises the optimum temperature distribution even in a large space.

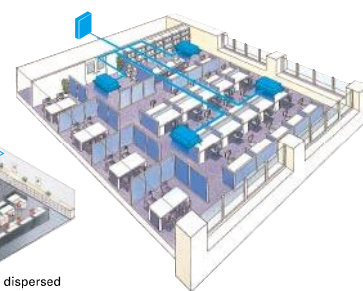

Connectable Combinations for Inverter Units (PUHZ-ZRP / PUHZ-RP / PUHZ-P)


| Outdoor Unit Capacity | Indoor Unit Capacity       |                        |                                |
|-----------------------|----------------------------|------------------------|--------------------------------|
|                       | Twin<br>50 : 50            | Triple<br>33 : 33 : 33 | Quadruple<br>25 : 25 : 25 : 25 |
| 71                    | 35 × 2                     | —                      | —                              |
| 100                   | 50 × 2                     | —                      | —                              |
| 125                   | 60 × 2                     | —                      | —                              |
| 140                   | 71 × 2                     | 50 × 3                 | —                              |
| 200                   | 100 × 2                    | 60 × 3                 | 50 × 4                         |
| 250                   | 125 × 2                    | 71 × 3                 | 60 × 4                         |
| Distribution Pipe     | MSDD-50TR-E<br>MSDD-50WR-E | MSDT-111R-E            | MSDF-1111R-E                   |

Notes: 1) Indoor unit combinations with floor-standing (PS) units and other types are impossible.  
2) The distribution pipe listed is required for simultaneous multi-systems.



# Power Inverter SERIES


Our new Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency through use of new technologies and high-performance compressor. Installation is now even easier thanks to outdoor units with a side-flow configuration, a maximum piping length of 120m and pipe-replacement technologies.

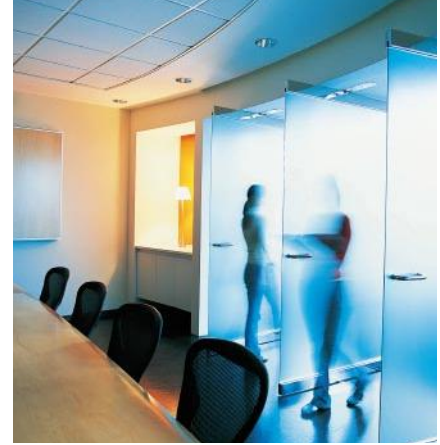

## Industry-leading Energy Efficiency in New Seasonal Ratings

Industry-leading energy efficiency has been achieved through optimisation of a newly designed compressor and use of the latest energy-saving technologies. The new Power Inverter Series, designed to realise outstanding seasonal energy-efficiency, achieves high energy-efficiency rankings of A<sup>+</sup> or A<sup>++</sup> for both cooling and heating in most categories. Annual power consumption has been drastically reduced to realise savings in operating cost.

Annual electricity consumption comparison (PLA-ZRP/PUHZ-ZRP vs PLA-RP/PUHZ-RP)

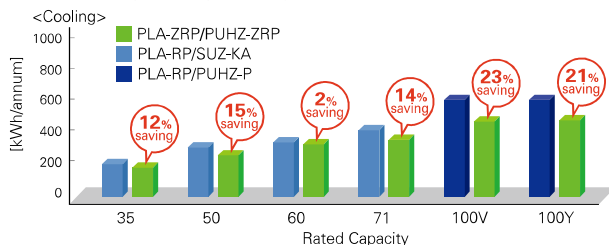

\* Results are based on our own simulations. Actual power consumption may vary depending on how and where the units are used.

Energy Rank (Cooling/Heating)

| Series                 |             | 35V                              | 50V                              | 60V                             | 71V                             | 100V                             |
|------------------------|-------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| 4-way ceiling cassette | PLA-ZRP BA  | A <sup>++</sup> /A <sup>++</sup> | A <sup>++</sup> /A <sup>++</sup> | A <sup>++</sup> /A <sup>+</sup> | A <sup>++</sup> /A <sup>+</sup> | A <sup>++</sup> /A <sup>++</sup> |
|                        | PLA-RP BA   | A <sup>++</sup> /A <sup>+</sup>  | A <sup>+</sup> /A <sup>+</sup>   | A <sup>+</sup> /A <sup>+</sup>  | A <sup>++</sup> /A <sup>+</sup> | A <sup>++</sup> /A <sup>+</sup>  |
| Wall-mounted           | PKA-HAL/KAL | A <sup>+</sup> /A <sup>+</sup>   | A <sup>+</sup> /A <sup>+</sup>   | A <sup>++</sup> /A <sup>+</sup> | A <sup>++</sup> /A <sup>+</sup> | A <sup>++</sup> /A <sup>+</sup>  |
| Ceiling-suspended      | PCA-KAQ     | A <sup>++</sup> /A <sup>+</sup>  | A <sup>+</sup> /A <sup>+</sup>   | A <sup>++</sup> /A <sup>+</sup> | A <sup>++</sup> /A <sup>+</sup> | A <sup>+</sup> /A <sup>+</sup>   |
|                        | PCA-HAQ     | —                                | —                                | —                               | A <sup>+</sup> /A <sup>+</sup>  | —                                |
| Floor-standing         | PSA-KA      | —                                | —                                | —                               | A <sup>++</sup> /A <sup>+</sup> | A <sup>+</sup> /A <sup>+</sup>   |
| Ceiling-concealed      | PEAD-JAQ    | A <sup>+</sup> /A <sup>+</sup>   | A <sup>+</sup> /A <sup>+</sup>   | A <sup>++</sup> /A <sup>+</sup> | A <sup>+</sup> /A <sup>+</sup>  | A <sup>+</sup> /A <sup>+</sup>   |

\* The ErP Directive (Lot 10) applies to air conditioners of rated capacity up to 12kW.

### ADVANCED ENERGY-SAVING TECHNOLOGIES

#### Highly efficient fan for outdoor unit


##### Fan opening of 550mm <100-250>

The opening for the fan in the outdoor unit is 550mm in diameter. By exchanging heat more efficiently, this will contribute to energy-saving and low noise level.



##### Improved fan <100-250>

A newly designed fan has been adopted, increasing airflow capacity and reducing operation noise.



#### Highly efficient heat exchanger


##### High-density heat exchanger <100-250>

ZRP 100-250 use 7.94mm-diameter pipe. The high-density heat exchanger contributes to efficient heat exchange and reduces the amount of refrigerant used, which is better for the environment.


3 lines, 64 columns  
(ZRP200-250)

+


2 lines, 64 columns  
(ZRP100-140)



#### Heat Interchanger (HIC) Added <140>

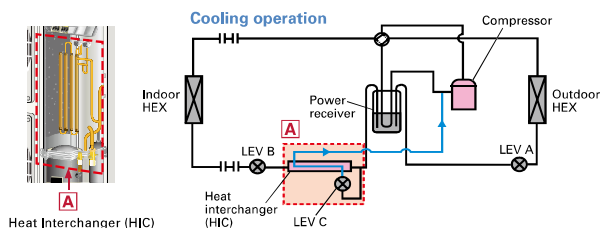

A HIC circuit has been added to improve energy efficiency during cooling operation. Liquid refrigerant is rerouted, transformed into a gas state and injected back into the system to increase overall pressure of the refrigerant being sent to the compressor, thereby reducing the load on the compressor and raising efficiency.

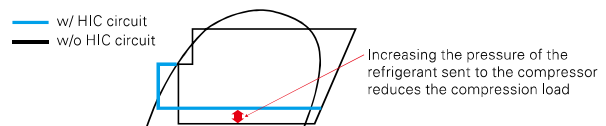

## Side-flow Outdoor Units

All operating capacities have been unified to the side-flow configuration. Even for locations requiring large capacities, the small footprint of these outdoor units enable them to be used anywhere.



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140/200/250

## Twin Rotary Compressor (PUHZ-ZRP35/50/60/71)

Powerful yet high-efficiency rotary compressors that make use of Mitsubishi Electric technologies to achieve industry-leading energy efficiency under the new seasonal ratings. Annual power consumption has been significantly reduced compared to conventional units thanks to original Mitsubishi Electric technologies: "Poki-Poki Motors", "Heat Caulking Fixing Method", "Divisible Middle Plate" and "Flat Induction Pipe."

## DC Scroll Compressor (PUHZ-ZRP100/125/140/200/250)

Our newly developed DC scroll compressor realises higher efficiency at partial load, which accounts for most of the operating time in both cooling and heating modes. The asymmetrically shaped scroll contributes to higher SEER and SCOP values and greatly reduces the annual power consumption. Compression efficiency is also improved through optimised compression and reduction of refrigerant pressure loss.

## 3-phase Power-supply Inverter (100-250)

Incorporation of a 3-phase power-supply realises a dramatic reduction in operating current. This special technology is equipped in outdoor units to ensure compliance with electromagnetic compatibility regulations in Europe.

Operating current comparison (for combinations using 4-way ceiling cassettes)

| Power Supply |              | PUHZ-ZRP100YKA2 | PUHZ-ZRP125YKA2 | PUHZ-ZRP140YKA2 |
|--------------|--------------|-----------------|-----------------|-----------------|
| 3-phase      | Max.         | 8.7             | 10.3            | 12.1            |
|              | Breaker size | 16              | 16              | 16              |
| Power Supply |              | PUHZ-ZRP100VKA2 | PUHZ-ZRP125VKA2 | PUHZ-ZRP140VKA2 |
| 1-phase      | Max.         | 27.2            | 27.3            | 29.1            |
|              | Breaker size | 32              | 32              | 40              |

## Long Pipe Length

The maximum piping length is 100m\*, enabling wide-ranging layout possibilities for unit installation.

| Model               | Max. Pipe Length | Max. Height Difference |
|---------------------|------------------|------------------------|
| PUHZ-ZRP35/50       | 50m              | 30m                    |
| PUHZ-ZRP60/71       | 50m              | 30m                    |
| PUHZ-ZRP100/125/140 | 75m              | 30m                    |
| PUHZ-ZRP200/250     | 100m             | 30m                    |

When the total control/power cable length exceeds 80m, separate power sources are required for the indoor and outdoor units. (An optional power-supply terminal kit is needed for indoor units with no power-supply terminal block.)

\*PUHZ-ZRP200/250 only




## Cleaning-free Pipe Reuse Technology


Ability to use existing piping reduces pipe waste and replacement time

## No Need to Clean at the Time of System Renewal\*

Chloride residue builds up in existing pipes and becomes a source of trouble. In addition, the iron particles and slime produced as a result of compressor failure lead to problems. To counter this, various original Mitsubishi Electric technologies have been combined to enable the introduction of "cleaning-free pipe reuse."

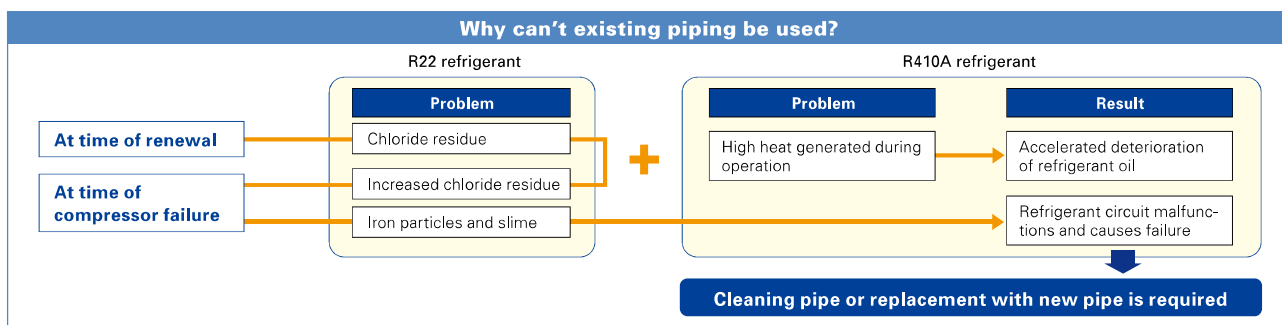

## Mitsubishi Electric's Original Replacement Technologies

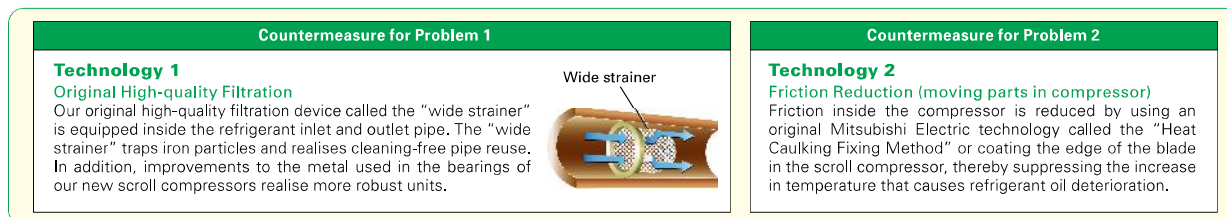

**Existing piping can be used without cleaning**

### \*Cautions when using existing piping

- When removing an old air conditioning unit, please make sure to perform the pump-down process and recover the refrigerant and refrigerant oil.
- Check to ensure that the piping diameter and thickness match Mitsubishi Electric specifications.
- Check to ensure that the flare is compatible with R410A.



PLA-ZRP35/50/60/71/100/125/140BA  
PLA-RP35/50/60/71/100/125/140BA

# PLA SERIES

A complete line-up including deluxe units that offer added energy savings. The incorporation of wide air-outlet and the "i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.



## Deluxe 4-way Cassette Line-up

For users seeking even further energy-savings, Mitsubishi Electric offers complete deluxe units (PLA-ZRP) for the complete line-up of models in this series from 35–140. Compared to the standard models (PLA-RP), deluxe models provide additional energy-savings, contributing to a significant reduction in electricity costs.

### Line-up

| Series                           | Model | 35          | 50          | 60          | 71          | 100          | 125          | 140          |
|----------------------------------|-------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|
| Deluxe 4-way Cassette (PLA-ZRP)  |       | PLA-ZRP35BA | PLA-ZRP50BA | PLA-ZRP60BA | PLA-ZRP71BA | PLA-ZRP100BA | PLA-ZRP125BA | PLA-ZRP140BA |
| Standard 4-way Cassette (PLA-RP) |       | PLA-RP35BA  | PLA-RP50BA  | PLA-RP60BA  | PLA-RP71BA  | PLA-RP100BA  | PLA-RP125BA  | PLA-RP140BA2 |

### Key Technologies for Higher Energy Efficiency


#### New Heat Exchanger Design

Heat exchanger fin size and pitch have been changed, raising energy efficiency.

#### Pre-grooved Piping


High-performance pre-grooved piping is utilised, increasing the heat exchange area.

### Indoor/Outdoor Unit Combinations

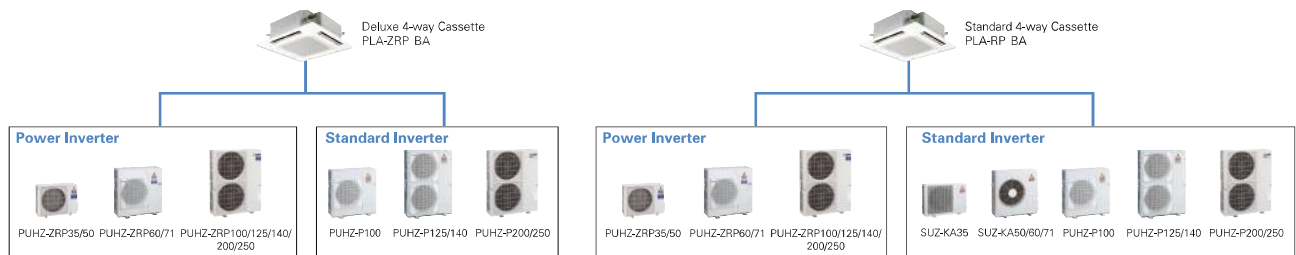

## "Rank A++/A+" Energy Savings Achieved for Deluxe 4-way Cassette


Our new deluxe 4-way cassette indoor units combined with newly designed Power Inverter outdoor units (PUHZ-ZRP) achieve industry-leading seasonal efficiency for both cooling and heating: all rank A++ for cooling and A+ or higher for heating.

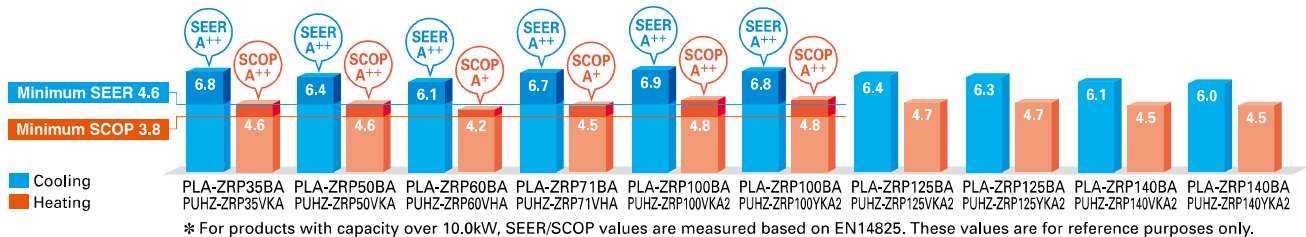

## Automatic Grille Lowering Function (PLP-6BAJ)

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the grille for maintenance.

The grille can be lowered a maximum of 4m from the ceiling in 8 steps, thus enabling easy cleaning of the air filter. Cleaning of the filter is an important factor for saving energy.

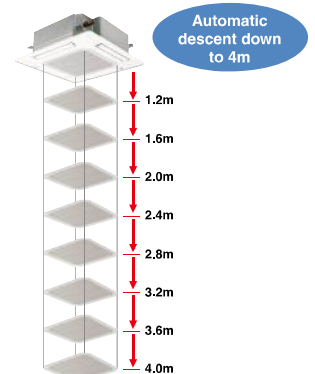


## Optimum Airflow

### Individual Vane Settings

Optimum airflow settings provide maximum comfort throughout the room.

In addition to the selection of variable airflow patterns (i.e., 2-, 3- or 4-way), this function allows the independent selection of vertical airflow levels for each vane, thereby maintaining a comfortable room environment with even temperature distribution.



72 airflow patterns

### Wide Airflow

Wide-angle outlets distribute airflow to all corners of the room.

The outlets are larger than those of previous models and the shape has been improved for better wide-angle ventilation.





Image of multi-directional air conditioning



### Individual Vane Setting + Wide Airflow


The combination of individual vane setting, which enables the optimal outlet setting for each room layout, and the wide airflow function works to ensure even temperature distribution throughout each room. The result is uniformly comfortable air conditioning.

## Wave Airflow – Thoroughly warming all corners of the room!

### Wave Airflow Operation

“Wave Airflow” is essentially the advanced control of the vanes directing the airflow from the unit. Blown-air is repeatedly dispersed from the unit in horizontal and downward directions at time-lagged intervals to provide uniform heating throughout the room.

### Thermograph of Wave Control Effect

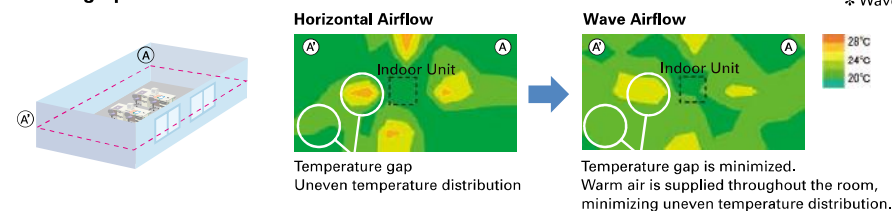


\* Wave Airflow is possible only when using the heating mode

Temperature distribution comparison approximately 20min after turning on a PLA-RP71BA 4-Way ceiling cassette. The measurement point for comparison is a plane 1.2m above the floor.

## Equipped with High- and Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

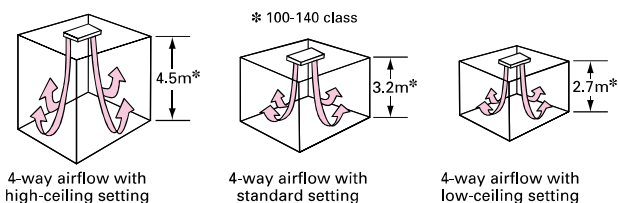

### Airflow Range

| Model | 35-71 class          |                  |                     | 100-140 class        |                  |                     |
|-------|----------------------|------------------|---------------------|----------------------|------------------|---------------------|
|       | High-ceiling setting | Standard setting | Low-ceiling setting | High-ceiling setting | Standard setting | Low-ceiling setting |
| 4-Way | 3.5m                 | 2.4m             | 2.5m                | 4.5m                 | 3.2m             | 2.7m                |
| 3-Way | 3.5m                 | 3.0m             | 2.7m                | 4.5m                 | 3.6m             | 3.0m                |
| 2-Way | 3.5m                 | 3.3m             | 3.0m                | 4.5m                 | 4.0m             | 3.3m                |

## Horizontal Airflow


A “Horizontal Airflow” function has been added to reduce drafty-feeling distribution. Horizontal Airflow prevents cold drafts from striking the body directly, thereby keeping the body from becoming over-chilled.



### [Airflow Distribution]

PLA-RP125BA

Flow angle, cooling at 20°C (ceiling height 3.2m)

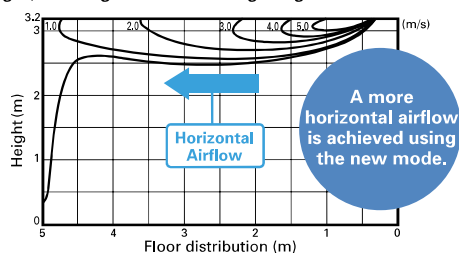


\* Smudge spots on the ceiling may form where the airflow is not evenly distributed.

## Automatic Air-speed Adjustment

An automatic air-speed mode that adjusts airflow speed automatically is adopted to maintain comfortable room conditions at all times. This setting automatically adjusts the air-speed to conditions that match the room environment.

At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room.

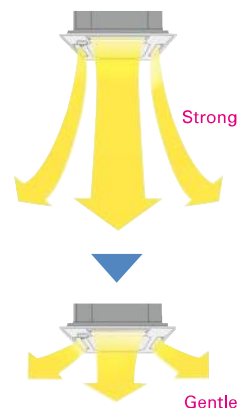


When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

# DOES HAVING COLD FEET BOTHER YOU?

The "i-see Sensor" is the answer to your problems!



**i-see Sensor**



**Heating Mode**

Warm air rises to the ceiling!

Even though the temperature on the remote controller is at a preset temperature, the temperature at floor level remains cold. As a result, there's no feeling of getting warmer.



**Cooling Mode**

Legs and feet feel cold!

At the beginning of operation, the room is nice and cool; but before long the temperature at floor level drops, causing the feeling of being too cold.

## "i-see Sensor" temperature-sensing technology improves energy efficiency and enhances room comfort

The "i-see Sensor" is an innovative Mitsubishi Electric technology that uses a radiation-based sensor to monitor temperature throughout an entire room. When connected to the air conditioner control panel, i-see Sensor works to maximize room comfort.

### i-see Sensor Panel



PLP-6BAE

or


### Corner Panel Only (Option)



PAC-SA1 ME-E

### i-see Sensor Operation


The i-see Sensor rotates 90° at intervals of 5 sec, accurately measuring the temperature throughout the room (covering entire floor space).

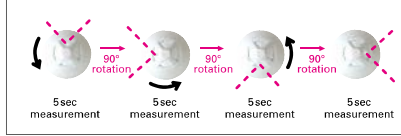

## A comfortable room environment cannot be maintained by monitoring only the temperature at the ceiling.


### Without "i-see Sensor"

Only intake-air temperature at the ceiling was measured, tending to overlook uneven temperature distribution at floor level.



Intake-air temperature sensor

Cassette without the i-see Sensor measures temperature in this area only.



Intake-air temperature sensor

Cassette equipped with the i-see Sensor measures upper and lower areas.


### Equipped with 4-Way Ceiling "i-see Sensor"

Both the floor temperature and intake-air temperature are measured to provide operation that creates a comfortable room environment from ceiling to floor.

### In Heating Mode

### When you want the temperature felt to be 20°

#### Temperature setting: 20°C (w/o i-see Sensor)




Temperature felt: 17°C (floor level 14°C)

Warm air rises to the ceiling. This causes poor heating at floor level, leaving legs and feet feeling cold.



#### Temperature setting: 20°C (w/ i-see Sensor + Automatic Air-speed Adjustment)

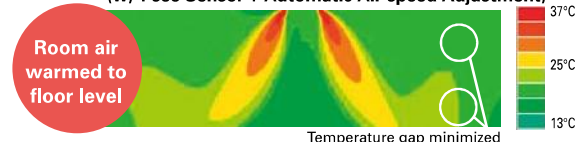


Temperature felt: 20°C (floor level 20°C)

The i-see Sensor detects the temperature at the floor while the Automatic Air-speed Adjustment eliminates uneven temperature distribution by thoroughly warming the air down to the floor.

### In Cooling Mode

### When you want the temperature felt to be 28°C

#### Temperature setting: 26-27°C (w/o i-see Sensor)

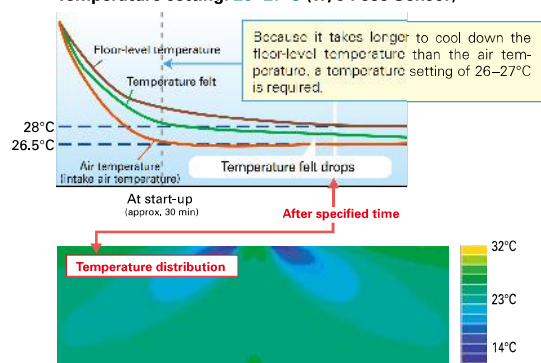


Temperature felt: 26.5°C

The temperature felt drops according to the drop in floor-level temperature. If the floor-level temperature is not monitored during long cooling operation, the temperature felt becomes chilly.



#### Temperature setting: 28°C (w/ i-see Sensor + Automatic Air-speed Adjustment)

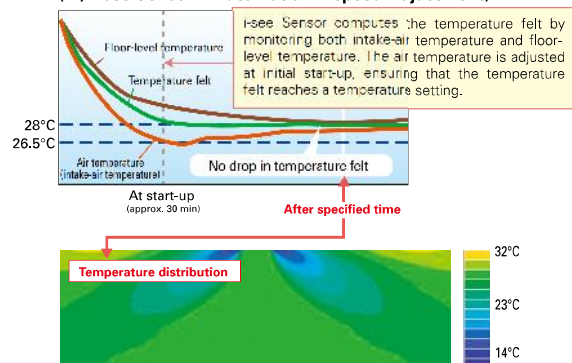

Temperature Felt: 28°C

Air temperature is adjusted according to the floor temperature to keep the temperature felt at 28°C.

Comfortable without excess chilliness

## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit



PLA-ZRP35/50/60/71/100/125/140BA

#### Standard Panel

PLP-6BA (only Panel)  
PLP-6BALM (with wireless remote controller)

#### Automatic Filter Elevation Panel

PLP-6BAJ (only Panel)

#### Standard Panel with "i-see Sensor"

PLP-6BAE (only Panel)  
PLP-6BALME (with wireless remote controller)

#### Outdoor Unit

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140

For Multi  
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

#### Remote Controller



Optional



Optional



\* Enclosed in PLP-6BALM/PLP-6BALME

### Standard Inverter Series



#### Indoor Unit



PLA-RP35/50/60/71/100/125/140BA

#### Standard Panel

PLP-6BA (only Panel)  
PLP-6BALM (with wireless remote controller)

#### Automatic Filter Elevation Panel

PLP-6BAJ (only Panel)

#### Standard Panel with "i-see Sensor"

PLP-6BAE (only Panel)  
PLP-6BALME (with wireless remote controller)

#### Outdoor Unit

For Single



SUZ-KA35



SUZ-KA50/60/71



PUHZ-P100



PUHZ-P125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-P100



PUHZ-P125/140



PUHZ-P200/250

#### Remote Controller



Optional



Optional



\* Enclosed in PLP-6BALM/PLP-6BALME

### PLZ-ZRP/RP BA Indoor Unit Combinations Indoor unit combinations shown below are possible.

| Indoor Unit Combination          |                   | Outdoor Unit Capacity |      |      |      |       |       |       |     |     |             |      |      |             |       |             |            |      |              |               |      |
|----------------------------------|-------------------|-----------------------|------|------|------|-------|-------|-------|-----|-----|-------------|------|------|-------------|-------|-------------|------------|------|--------------|---------------|------|
|                                  |                   | For Single            |      |      |      |       |       |       |     |     | For Twin    |      |      |             |       |             | For Triple |      |              | For Quadruple |      |
|                                  |                   | 35                    | 50   | 60   | 71   | 100   | 125   | 140   | 200 | 250 | 71          | 100  | 125  | 140         | 200   | 250         | 140        | 200  | 250          | 200           | 250  |
| Power Inverter (PUHZ-ZRP)        |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | –   | –   | 35x2        | 50x2 | 60x2 | 71x2        | 100x2 | 125x2       | 50x3       | 60x3 | 71x3         | 50x4          | 60x4 |
|                                  | Distribution Pipe | –                     | –    | –    | –    | –     | –     | –     | –   | –   | MSDD-50TR-E |      |      | MSDD-50WR-E |       | MSDT-111R-E |            |      | MSDF-1111R-E |               |      |
| Standard Inverter (PUHZ-P & SUZ) |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | –   | –   | –           | 50x2 | 60x2 | 71x2        | 100x2 | 125x2       | 50x3       | 60x3 | 71x3         | 50x4          | 60x4 |
|                                  | Distribution Pipe | –                     | –    | –    | –    | –     | –     | –     | –   | –   | MSDD-50TR-E |      |      | MSDD-50WR-E |       | MSDT-111R-E |            |      | MSDF-1111R-E |               |      |



# PLZ-RP SERIES

## POWER INVERTER



| Type                     |                                  |                                 | Inverter Heat Pump  |                 |                       |                       |                 |                 |                 |                 |                  |                 |
|--------------------------|----------------------------------|---------------------------------|---|-----------------|-----------------------|-----------------------|-----------------|-----------------|-----------------|-----------------|------------------|-----------------|
| Indoor Unit              |                                  |                                 | PLA-ZRP35BA   | PLA-ZRP50BA     | PLA-ZRP60BA           | PLA-ZRP71BA           | PLA-ZRP100BA    |                 | PLA-ZRP125BA    |                 | PLA-ZRP140BA     |                 |
| Outdoor Unit             |                                  |                                 | PUHZ-ZRP35VKA   | PUHZ-ZRP50VKA   | PUHZ-ZRP60VHA         | PUHZ-ZRP71VHA         | PUHZ-ZRP100VKA2 | PUHZ-ZRP100YKA2 | PUHZ-ZRP125VKA2 | PUHZ-ZRP125YKA2 | PUHZ-ZRP140VKA2  | PUHZ-ZRP140YKA2 |
| Refrigerant              |                                  |                                 | R410A*1   |                 |                       |                       |                 |                 |                 |                 |                  |                 |
| Power Supply             |                                  |                                 | Outdoor power supply<br>VKA · VKA2 · VHA:230 / Single / 50, YKA2:400 / Three / 50 |                 |                       |                       |                 |                 |                 |                 |                  |                 |
| Cooling                  | Capacity                         | Rated                           | kW  | 3.6             | 5.0                   | 6.1                   | 7.1             | 9.5             | 9.5             | 12.5            | 12.5             | 13.4            |
|                          |                                  | Min - Max                       | kW  | 1.6 - 4.5       | 2.3 - 5.6             | 2.7 - 6.5             | 3.3 - 8.1       | 4.9 - 11.4      | 4.9 - 11.4      | 5.5 - 14.0      | 5.5 - 14.0       | 6.2 - 15.0      |
|                          | Total Input                      | Rated                           | kW  | 0.79            | 1.43                  | 1.78                  | 1.77            | 2.16            | 2.16            | 3.87            | 3.87             | 4.37            |
|                          | EER                              |                                 |   | —               | —                     | —                     | —               | —               | —               | 3.23            | 3.23             | 3.07            |
|                          | EEL Rank                         |                                 |   | —               | —                     | —                     | —               | —               | —               | —               | —                | —               |
|                          | Design Load                      |                                 | kW  | 3.6             | 5.0                   | 6.1                   | 7.1             | 9.5             | 9.5             | 12.5            | 12.5             | 13.4            |
|                          | Annual Electricity Consumption*2 |                                 | kWh/a   | 185             | 272                   | 350                   | 370             | 484             | 493             | 685             | 695              | 770             |
|                          | SEER                             |                                 |   | 6.8             | 6.4                   | 6.1                   | 6.7             | 6.9             | 6.8             | 6.4             | 6.3              | 6.1**           |
|                          | Energy Efficiency Class          |                                 |   | A++             | A++                   | A++                   | A++             | A++             | A++             | —               | —                | —               |
|                          | Capacity                         | Rated                           | kW  | 4.1             | 6.0                   | 7.0                   | 8.0             | 11.2            | 11.2            | 14.0            | 14.0             | 16.0            |
| Heating (Average Season) |                                  | Min - Max                       | kW  | 1.6 - 5.2       | 2.5 - 7.3             | 2.8 - 8.2             | 3.5 - 10.2      | 4.5 - 14.0      | 4.5 - 14.0      | 5.0 - 16.0      | 5.0 - 16.0       | 5.7 - 18.0      |
|                          | Total Input                      | Rated                           | kW  | 0.86            | 1.57                  | 2.04                  | 1.99            | 2.60            | 2.60            | 3.67            | 3.67             | 4.70            |
|                          | COP                              |                                 |   | —               | —                     | —                     | —               | —               | —               | 3.81            | 3.81             | 3.40            |
|                          | EEL Rank                         |                                 |   | —               | —                     | —                     | —               | —               | —               | —               | —                | —               |
|                          | Design Load                      |                                 | kW  | 2.4             | 3.8                   | 4.4                   | 4.7             | 7.8             | 7.8             | 9.3             | 9.3              | 10.6            |
|                          | Declared Capacity                | at reference design temperature | kW  | 2.4 (-10°C)     | 3.8 (-10°C)           | 4.4 (-10°C)           | 4.7 (-10°C)     | 7.8 (-10°C)     | 7.8 (-10°C)     | 9.3 (-10°C)     | 9.3 (-10°C)      | 10.6 (-10°C)    |
|                          |                                  | at bivalent temperature         | kW  | 2.4 (-10°C)     | 3.8 (-10°C)           | 4.4 (-10°C)           | 4.7 (-10°C)     | 7.8 (-10°C)     | 7.8 (-10°C)     | 9.3 (-10°C)     | 9.3 (-10°C)      | 10.6 (-10°C)    |
|                          |                                  | at operation limit temperature  | kW  | 2.2 (-11°C)     | 3.7 (-11°C)           | 2.8 (-10°C)           | 3.5 (-10°C)     | 5.8 (-20°C)     | 5.8 (-20°C)     | 7.0 (-20°C)     | 7.0 (-20°C)      | 7.9 (-20°C)     |
|                          | Back Up Heating Capacity         |                                 | kW  | 0               | 0                     | 0                     | 0               | 0               | 0               | 0               | 0                | 0               |
|                          | Annual Electricity Consumption*2 |                                 | kWh/a   | 729             | 1162                  | 1462                  | 1476            | 2275            | 2275            | 2778            | 2778             | 3324            |
| Indoor Unit              | SCOP                             |                                 |   | 4.6             | 4.6                   | 4.2                   | 4.5             | 4.8             | 4.8             | 4.7**           | 4.7**            | 4.5**           |
|                          | Energy Efficiency Class          |                                 |   | A++             | A++                   | A+                    | A+              | A++             | A++             | —               | —                | —               |
|                          | Operating Current (max)          |                                 | A   | 13.3            | 13.3                  | 19.3                  | 19.5            | 27.2            | 27.2            | 37.3            | 37.3             | 47.1            |
|                          | Input                            | Rated                           | kW  | 0.04            | 0.04                  | 0.04                  | 0.05            | 0.08            | 0.08            | 0.09            | 0.09             | 0.12            |
|                          | Operating Current (max)          |                                 | A   | 0.28            | 0.30                  | 0.30                  | 0.45            | 0.74            | 0.74            | 0.80            | 0.80             | 1.07            |
|                          | Dimensions <Panel>               | H × W × D                       | mm  | 258 - 840 - 840 | <35 - 950 - 950>      | 25 <6>                | 25 <6>          | 26 <6>          | 26 <6>          | 298 - 840 - 840 | <35 - 950 - 950> | 27 <6>          |
|                          | Weight <Panel>                   |                                 | kg  | 23 <6>          | 23 <6>                | 23 <6>                | 25 <6>          | 26 <6>          | 26 <6>          | 27 <6>          | 27 <6>           | 27 <6>          |
|                          | Air Volume                       | [L <sub>o</sub> -Mi2-Mi1-Hi]    | m <sup>3</sup> /min   | 11-13-15-16     | 12-14-16-18           | 12-14-16-18           | 17-19-21-23     | 20-23-26-30     | 20-23-26-30     | 22-25-28-31     | 22-25-28-31      | 24-26-29-32     |
|                          | Sound Level (SPL)                | [L <sub>o</sub> -Mi2-Mi1-Hi]    | dB(A)   | 27-28-29-31     | 28-29-31-32           | 28-30-31-32           | 28-30-34-36     | 32-34-37-40     | 32-34-37-40     | 34-36-39-41     | 34-36-39-41      | 36-39-42-44     |
|                          | Sound Level (PWL)                |                                 | dB(A)   | 54              | 55                    | 55                    | 58              | 65              | 65              | 66              | 66               | 70              |
| Outdoor Unit             | Dimensions                       | H × W × D                       | mm  | 630 - 809 - 300 | 943 - 950 - 330 (+30) | 943 - 950 - 330 (+30) | 116             | 123             | 116             | 125             | 118              | 131             |
|                          | Weight                           |                                 | kg  | 43              | 46                    | 67                    | 67              | 110             | 110             | 120             | 120              | 120             |
|                          | Air Volume                       | Cooling                         | m <sup>3</sup> /min   | 45.0            | 45.0                  | 55.0                  | 55.0            | 110.0           | 110.0           | 120.0           | 120.0            | 120.0           |
|                          |                                  | Heating                         | m <sup>3</sup> /min   | 45.0            | 45.0                  | 55.0                  | 55.0            | 110.0           | 110.0           | 120.0           | 120.0            | 120.0           |
|                          | Sound Level (SPL)                | Cooling                         | dB(A)   | 44              | 44                    | 47                    | 47              | 49              | 49              | 50              | 50               | 50              |
|                          |                                  | Heating                         | dB(A)   | 46              | 46                    | 48                    | 48              | 51              | 51              | 52              | 52               | 52              |
|                          | Sound Level (PWL)                | Cooling                         | dB(A)   | 65              | 65                    | 67                    | 67              | 69              | 69              | 70              | 70               | 70              |
|                          |                                  | Heating                         | dB(A)   | 66              | 66                    | 68                    | 68              | 71              | 71              | 72              | 72               | 73              |
|                          | Operating Current (max)          |                                 | A   | 13.0            | 13.0                  | 19.0                  | 19.0            | 26.5            | 26.5            | 35.5            | 35.5             | 44.0            |
|                          | Breaker Size                     |                                 | A   | 16              | 16                    | 25                    | 25              | 32              | 32              | 40              | 40               | 50              |
| Ext. Piping              | Diameter                         | Liquid / Gas                    | mm  | 6.35 / 12.7     | 6.35 / 12.7           | 9.52 / 15.88          | 9.52 / 15.88    | 9.52 / 15.88    | 9.52 / 15.88    | 9.52 / 15.88    | 9.52 / 15.88     | 9.52 / 15.88    |
|                          | Max. Length                      | Out-In                          | m   | 50              | 50                    | 50                    | 50              | 75              | 75              | 75              | 75               | 75              |
|                          | Max. Height                      | Out-In                          | m   | 30              | 30                    | 30                    | 30              | 30              | 30              | 30              | 30               | 30              |
|                          | Guaranteed Operating Range       | Cooling*3                       | °C  | -15 ~ +46       | -15 ~ +46             | -15 ~ +46             | -15 ~ +46       | -15 ~ +46       | -15 ~ +46       | -15 ~ +46       | -15 ~ +46        | -15 ~ +46       |
| [Outdoor]                |                                  |                                 | Heating   | °C              | -11 ~ +21             | -11 ~ +21             | -20 ~ +21       | -20 ~ +21       | -20 ~ +21       | -20 ~ +21       | -20 ~ +21        | -20 ~ +21       |


\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C. \*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PLZ-P SERIES

## STANDARD INVERTER



| Type                                 |                                  |                                 | Inverter Heat Pump   |                                  |             |                 |               |                       |               |              |                        |              |              |
|--------------------------------------|----------------------------------|---------------------------------|--|----------------------------------|-------------|-----------------|---------------|-----------------------|---------------|--------------|------------------------|--------------|--------------|
| Indoor Unit                          |                                  |                                 | PLA-RP35BA   | PLA-RP50BA                       | PLA-RP60BA  | PLA-RP71BA      | PLA-RP100BA   |                       | PLA-RP125BA   |              | PLA-RP140BA2           |              |              |
| Outdoor Unit                         |                                  |                                 | SUZ-KA35VA4  | SUZ-KA50VA4                      | SUZ-KA60VA4 | SUZ-KA71VA4     | PUHZ-P100VHA4 | PUHZ-P100YHA2         | PUHZ-P125VHA3 | PUHZ-P125YHA | PUHZ-P140VHA3          | PUHZ-P140YHA |              |
| Refrigerant                          |                                  |                                 | R410A*1  |                                  |             |                 |               |                       |               |              |                        |              |              |
| Power Supply                         |                                  |                                 | Outdoor power supply<br>VA4・VHA3・VHA4:230 / Single / 50, YHA・YHA2:400 / Three / 50 |                                  |             |                 |               |                       |               |              |                        |              |              |
| Cooling                              | Capacity                         | Rated                           | kW   | 3.6                              | 5.5         | 6.1             | 7.1           | 9.4                   | 9.4           | 12.3         | 12.3                   | 13.6         |              |
|                                      |                                  | Min - Max                       | kW   | 1.4 - 3.9                        | 2.3 - 5.6   | 2.3 - 6.3       | 2.8 - 8.1     | 4.9 - 11.2            | 4.9 - 11.2    | 5.5 - 14.0   | 5.5 - 14.0             | 5.5 - 15.0   |              |
|                                      | Total Input                      | Rated                           | kW   | 1.090                            | 1.660       | 1.840           | 2.100         | 3.120                 | 3.120         | 4.090        | 4.090                  | 5.210        |              |
|                                      | EER                              |                                 |  | —                                | —           | —               | —             | —                     | —             | 3.01         | 3.01                   | 2.61         |              |
|                                      |                                  | EEL Rank                        |  | —                                | —           | —               | —             | —                     | —             | B            | B                      | D            |              |
|                                      | Design Load                      |                                 | kW   | 3.6                              | 5.5         | 6.1             | 7.1           | 9.4                   | 9.4           | —            | —                      | —            |              |
|                                      | Annual Electricity Consumption*2 | kWh/a                           | 210  | 321                              | 356         | 429             | 628           | 628                   | —             | —            | —                      |              |              |
|                                      | SEER                             |                                 |  | 6.0                              | 6.0         | 6.0             | 5.8           | 5.2                   | 5.2           | —            | —                      | —            |              |
|                                      |                                  | Energy Efficiency Class         |  | A+                               | A+          | A+              | A+            | A                     | A             | —            | —                      | —            |              |
|                                      | Heating (Average Season)         | Capacity                        | Rated  | kW                               | 4.1         | 6.0             | 6.9           | 8.0                   | 11.2          | 11.2         | 14.0                   | 14.0         | 16.0         |
|                                      |                                  | Min - Max                       | kW   | 1.7 - 5.0                        | 1.7 - 7.2   | 2.5 - 8.0       | 2.6 - 10.2    | 4.5 - 12.5            | 4.5 - 12.5    | 5.0 - 16.0   | 5.0 - 16.0             | 5.0 - 18.0   |              |
| Total Input                          |                                  | Rated                           | kW   | 1.040                            | 1.750       | 1.970           | 2.247         | 3.280                 | 3.280         | 4.110        | 4.110                  | 4.980        |              |
| COP                                  |                                  |                                 |  | —                                | —           | —               | —             | —                     | —             | 3.41         | 3.41                   | 3.21         |              |
|                                      |                                  | EEL Rank                        |  | —                                | —           | —               | —             | —                     | —             | B            | B                      | C            |              |
| Design Load                          |                                  |                                 | kW   | 2.6                              | 4.3         | 4.6             | 5.8           | 8.0                   | 8.0           | —            | —                      | —            |              |
| Declared Capacity                    |                                  | at reference design temperature | kW   | 2.3 (−10℃)                       | 3.8 (−10℃)  | 4.0 (−10℃)      | 4.7 (−10℃)    | 6.3 (−10℃)            | 6.3 (−10℃)    | —            | —                      | —            |              |
|                                      |                                  | at bivalent temperature         | kW   | 2.3 (−7℃)                        | 3.8 (−7℃)   | 4.0 (−7℃)       | 5.1 (−7℃)     | 7.1 (−7℃)             | 7.1 (−7℃)     | —            | —                      | —            |              |
|                                      |                                  | at operation limit temperature  | kW   | 2.3 (−10℃)                       | 3.8 (−10℃)  | 4.0 (−10℃)      | 4.7 (−10℃)    | 5.0 (−15℃)            | 5.0 (−15℃)    | —            | —                      | —            |              |
| Back Up Heating Capacity             |                                  |                                 | kW   | 0.3                              | 0.5         | 0.6             | 1.1           | 1.7                   | 1.7           | —            | —                      | —            |              |
| Annual Electricity Consumption*2     | kWh/a                            | 867                             | 1503   | 1570                             | 1913        | 2945            | 2945          | —                     | —             | —            |                        |              |              |
| SCOP                                 |                                  |                                 | 4.2  | 4.0                              | 4.1         | 4.3             | 3.8           | 3.8                   | —             | —            | —                      |              |              |
|                                      | Energy Efficiency Class          |                                 | A+   | A+                               | A+          | A+              | A             | A                     | —             | —            | —                      |              |              |
| Operating Current (max)              |                                  |                                 | A  | 8.4                              | 12.4        | 14.4            | 16.6          | 28.9                  | 13.9          | 29.0         | 14.0                   | 30.5         | 14.0         |
| Indoor Unit                          | Input                            | Rated                           | kW   | 0.03                             | 0.05        | 0.05            | 0.07          | 0.14                  | 0.14          | 0.15         | 0.15                   | 0.15         |              |
|                                      | Operating Current (max)          |                                 | A  | 0.22                             | 0.36        | 0.36            | 0.51          | 0.94                  | 0.94          | 1.00         | 1.00                   | 1.00         |              |
|                                      | Dimensions <Panel>               | H × W × D                       | mm   | 258 - 840 - 840 <35 - 950 - 950> |             |                 | 25 <6>        | 25 <6>                | 25 <6>        | 25 <6>       | 25 <6>                 | 27 <6>       | 27 <6>       |
|                                      | Weight <Panel>                   |                                 | kg   | 22 <6>                           | 22 <6>      | 23 <6>          | 23 <6>        | 25 <6>                | 25 <6>        | 25 <6>       | 25 <6>                 | 27 <6>       | 27 <6>       |
|                                      | Air Volume                       | [L <sub>o</sub> -Mi2-Mi1-Hi]    | m <sup>3</sup> /min  | 11-12-13-15                      | 12-14-16-18 | 12-14-16-18     | 14-16-18-21   | 20-23-26-30           | 20-23-26-30   | 22-25-28-31  | 22-25-28-31            | 24-26-29-32  | 24-26-29-32  |
|                                      | Sound Level (SPL)                | [L <sub>o</sub> -Mi2-Mi1-Hi]    | dB(A)  | 27-28-29-31                      | 28-29-31-32 | 28-29-31-32     | 28-30-32-34   | 32-34-37-40           | 32-34-37-40   | 34-36-39-41  | 34-36-39-41            | 36-39-42-44  | 36-39-42-44  |
|                                      | Sound Level (PWL)                |                                 | dB(A)  | 54                               | 55          | 55              | 56            | 62                    | 62            | 63           | 63                     | 70           | 70           |
|                                      | Dimensions                       | H × W × D                       | mm   | 550 - 800 - 285                  | 55          | 880 - 840 - 330 | 53            | 943 - 950 - 330 (+30) | 99            | 99           | 1350 - 950 - 330 (+30) | 101          | 101          |
|                                      | Weight                           |                                 | kg   | 35                               | 54          | 50              | 53            | 75                    | 77            | 99           | 101                    | 99           | 99           |
|                                      | Air Volume                       | Cooling                         | m <sup>3</sup> /min  | 36.3                             | 44.6        | 40.9            | 50.1          | 60.0                  | 60.0          | 100.0        | 100.0                  | 100.0        | 100.0        |
|                                      | Heating                          | m <sup>3</sup> /min             | 34.8   | 44.6                             | 40.2        | 48.2            | 60.0          | 60.0                  | 100.0         | 100.0        | 100.0                  | 100.0        |              |
| Outdoor Unit                         | Sound Level (SPL)                | Cooling                         | dB(A)  | 49                               | 52          | 55              | 55            | 50                    | 50            | 51           | 51                     | 52           | 52           |
|                                      |                                  | Heating                         | dB(A)  | 50                               | 52          | 55              | 55            | 54                    | 54            | 55           | 55                     | 56           | 56           |
|                                      | Sound Level (PWL)                | Cooling                         | dB(A)  | 62                               | 65          | 65              | 69            | 70                    | 70            | 71           | 71                     | 73           | 73           |
|                                      | Operating Current (max)          |                                 | A  | 8.2                              | 12.0        | 14.0            | 16.1          | 28.0                  | 13.0          | 28.0         | 13.0                   | 29.5         | 13.0         |
|                                      | Breaker Size                     |                                 | A  | 10                               | 20          | 20              | 20            | 32                    | 16            | 32           | 16                     | 40           | 16           |
|                                      | Diameter                         | Liquid / Gas                    | mm   | 6.35 / 9.52                      | 6.35 / 12.7 | 6.35 / 15.88    | 9.52 / 15.88  | 9.52 / 15.88          | 9.52 / 15.88  | 9.52 / 15.88 | 9.52 / 15.88           | 9.52 / 15.88 | 9.52 / 15.88 |
|                                      | Max. Length                      | Out-In                          | m  | 20                               | 30          | 30              | 30            | 50                    | 50            | 50           | 50                     | 50           | 50           |
|                                      | Max. Height                      | Out-In                          | m  | 12                               | 30          | 30              | 30            | 30                    | 30            | 30           | 30                     | 30           | 30           |
| Guaranteed Operating Range [Outdoor] |                                  |                                 | Cooling*3  | ℃                                | −10 ~ +46   | −15 ~ +46       | −15 ~ +46     | −15 ~ +46             | −15 ~ +46     | −15 ~ +46    | −15 ~ +46              | −15 ~ +46    |              |
|                                      |                                  | Heating                         | ℃  | −10 ~ +24                        | −10 ~ +24   | −10 ~ +24       | −10 ~ +24     | −15 ~ +21             | −15 ~ +21     | −15 ~ +21    | −15 ~ +21              | −15 ~ +21    |              |



# PLZ-RP SERIES

## POWER INVERTER



| Type                                 |                                  |                                 | Inverter Heat Pump  |   |   |               |                 |                 |                 |                 |                 |              |              |      |
|--------------------------------------|----------------------------------|---------------------------------|---|---|---|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|--------------|------|
| Indoor Unit                          |                                  |                                 | PLA-RP35BA  | PLA-RP50BA  | PLA-RP60BA  | PLA-RP71BA    | PLA-RP100BA     |                 | PLA-RP125BA     |                 | PLA-RP140BA2    |              |              |      |
| Outdoor Unit                         |                                  |                                 | PUHZ-ZRP35VKA   | PUHZ-ZRP50VKA   | PUHZ-ZRP60VHA   | PUHZ-ZRP71VHA | PUHZ-ZRP100VKA2 | PUHZ-ZRP125VKA2 | PUHZ-ZRP125YKA2 | PUHZ-ZRP140VKA2 | PUHZ-ZRP140YKA2 |              |              |      |
| Refrigerant                          |                                  |                                 | R410A*1   |   |   |               |                 |                 |                 |                 |                 |              |              |      |
| Power Supply                         | Source Outdoor (V/Phase/Hz)      |                                 | Outdoor power supply<br>VKA · VKA2 · VHA:230 / Single / 50, YKA2:400 / Three / 50 |   |   |               |                 |                 |                 |                 |                 |              |              |      |
| Cooling                              | Capacity                         | Rated                           | kW  | 3.5   | 5.0   | 6.1           | 7.1             | 9.5             | 9.5             | 12.5            | 12.5            | 13.4         | 13.4         |      |
|                                      |                                  | Min - Max                       | kW  | 1.6 ~ 4.5   | 2.3 ~ 5.6   | 2.7 ~ 6.5     | 3.3 ~ 8.1       | 4.9 ~ 11.4      | 4.9 ~ 11.4      | 5.5 ~ 14.0      | 5.5 ~ 14.0      | 6.2 ~ 15.0   | 6.2 ~ 15.0   |      |
|                                      | Total Input                      | Rated                           | kW  | 0.88  | 1.43  | 1.90          | 1.87            | 2.21            | 2.21            | 3.99            | 3.99            | 4.40         | 4.40         |      |
|                                      | EER                              |                                 |   | —   | —   | —             | —               | —               | —               | 3.13            | 3.13            | 3.05         | 3.05         |      |
|                                      |                                  | EEL Rank                        |   | —   | —   | —             | —               | —               | —               | —               | —               | —            | —            |      |
|                                      | Design Load                      |                                 | kW  | 3.5   | 5.0   | 6.1           | 7.1             | 9.5             | 9.5             | 12.5            | 12.5            | 13.4         | 13.4         |      |
|                                      | Annual Electricity Consumption*2 | kWh/a                           |   | 189   | 311   | 371           | 387             | 511             | 522             | 875             | 886             | 849          | 860          |      |
|                                      | SEER                             |                                 |   | 6.5   | 5.6   | 5.7           | 6.4             | 6.5             | 6.4             | 5.0*4           | 4.9*4           | 5.5*4        | 5.5*4        |      |
|                                      |                                  | Energy Efficiency Class         |   | A++   | A+  | A+            | A++             | A++             | A++             | —               | —               | —            | —            |      |
|                                      | Heating (Average Season)         | Capacity                        | Rated   | kW  | 4.1   | 6.0           | 7.0             | 8.0             | 11.2            | 11.2            | 14.0            | 14.0         | 16.0         | 16.0 |
|                                      |                                  | Min - Max                       | kW  | 1.6 ~ 5.2   | 2.5 ~ 7.3   | 2.8 ~ 8.2     | 3.5 ~ 10.2      | 4.5 ~ 14.0      | 4.5 ~ 14.0      | 5.0 ~ 16.0      | 5.0 ~ 16.0      | 5.7 ~ 18.0   | 5.7 ~ 18.0   |      |
| Total Input                          |                                  | Rated                           | kW  | 0.96  | 1.82  | 2.17          | 2.21            | 2.95            | 2.95            | 3.91            | 3.91            | 4.76         | 4.76         |      |
| COP                                  |                                  |                                 |   | —   | —   | —             | —               | —               | —               | 3.58            | 3.58            | 3.36         | 3.36         |      |
|                                      |                                  | EEL Rank                        |   | —   | —   | —             | —               | —               | —               | —               | —               | —            | —            |      |
| Design Load                          |                                  |                                 | kW  | 2.3   | 3.8   | 4.4           | 4.7             | 7.8             | 7.8             | 9.3             | 9.3             | 10.6         | 10.6         |      |
| Declared Capacity                    |                                  | at reference design temperature | kW  | 2.3 (−10°C)   | 3.8 (−10°C)   | 4.4 (−10°C)   | 4.7 (−10°C)     | 7.8 (−10°C)     | 7.8 (−10°C)     | 9.3 (−10°C)     | 9.3 (−10°C)     | 10.6 (−10°C) | 10.6 (−10°C) |      |
|                                      |                                  | at bivalent temperature         | kW  | 2.3 (−10°C)   | 3.8 (−10°C)   | 4.4 (−10°C)   | 4.7 (−10°C)     | 7.8 (−10°C)     | 7.8 (−10°C)     | 9.3 (−10°C)     | 9.3 (−10°C)     | 10.6 (−10°C) | 10.6 (−10°C) |      |
|                                      |                                  | at operation limit temperature  | kW  | 2.2 (−11°C)   | 3.7 (−11°C)   | 2.8 (−20°C)   | 3.5 (−20°C)     | 5.8 (−20°C)     | 5.8 (−20°C)     | 7.0 (−20°C)     | 7.0 (−20°C)     | 7.9 (−20°C)  | 7.9 (−20°C)  |      |
| Back Up Heating Capacity             |                                  |                                 | kW  | 0   | 0   | 0             | 0               | 0               | 0               | 0               | 0               | 0            | 0            |      |
| Annual Electricity Consumption*2     | kWh/a                            |                                 | 750   | 1313  | 1576  | 1521          | 2511            | 2511            | 3304            | 3304            | 3746            | 3746         |              |      |
| SCOP                                 |                                  |                                 | 4.3   | 4.1   | 3.9   | 4.3           | 4.3             | 4.3             | 3.9*4           | 3.9*4           | 4.0*4           | 4.0*4        |              |      |
|                                      | Energy Efficiency Class          |                                 | A+  | A+  | A   | A+            | A+              | A+              | —               | —               | —               | —            |              |      |
| Operating Current (max)              |                                  | A                               | 13.2  | 13.4  | 19.4  | 19.5          | 27.4            | 8.9             | 27.5            | 10.5            | 29.1            | 14.1         |              |      |
| Indoor Unit                          | Input                            | Rated                           | kW  | 0.03  | 0.05  | 0.05          | 0.07            | 0.14            | 0.14            | 0.15            | 0.16            | 0.16         |              |      |
|                                      | Operating Current (max)          |                                 | A   | 0.22  | 0.36  | 0.36          | 0.51            | 0.94            | 0.94            | 1.00            | 1.00            | 1.07         |              |      |
| Dimensions <Panel> H × W × D         |                                  |                                 | mm  | 258 - 840 - 840 <35 - 950 - 950>  |   |               |                 |                 |                 |                 |                 |              |              |      |
| Weight <Panel>                       |                                  |                                 | kg  | 22 <6> 22 <6> 23 <6> 23 <6> 25 <6> 25 <6> 29 <6> 29 <6> 27 <6> 27 <6>   |   |               |                 |                 |                 |                 |                 |              |              |      |
| Air Volume [Lo-Mi2-Mi1-Hi]           |                                  |                                 | m³/min  | 11-12-13-15 12-14-16-18 12-14-16-18 14-16-18-21 20-23-26-30 20-23-26-30 22-25-28-31 22-25-28-31 24-26-29-32 24-26-29-32         |   |               |                 |                 |                 |                 |                 |              |              |      |
| Sound Level (SPL) [Lo-Mi2-Mi1-Hi]    |                                  |                                 | dB(A)   | 27-28-29-31 28-29-31-32 28-29-31-32 28-30-32-34 32-34-37-40 32-34-37-40 34-36-39-41 34-36-39-41 36-39-42-44 36-39-42-44         |   |               |                 |                 |                 |                 |                 |              |              |      |
| Sound Level (PWL)                    |                                  |                                 | dB(A)   | 54 55 55 56 62 62 63 63 70 70   |   |               |                 |                 |                 |                 |                 |              |              |      |
| Outdoor Unit                         | Dimensions                       | H × W × D                       | mm  | 630 - 809 - 300 943 - 950 - 330 (+30) 943 - 950 - 330 (+30) 1338 - 1050 - 330 (+40)   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Weight                           |                                 | kg  | 43 46 67 67 116 123 116 125 118 131   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Air Volume                       | Cooling                         | m³/min  | 45.0 45.0 55.0 55.0 110.0 110.0 120.0 120.0 120.0 120.0   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      |                                  | Heating                         | m³/min  | 45.0 45.0 55.0 55.0 110.0 110.0 120.0 120.0 120.0 120.0   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Sound Level (SPL)                | Cooling                         | dB(A)   | 44 44 47 47 49 49 50 50 50 50   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      |                                  | Heating                         | dB(A)   | 46 46 48 48 51 51 52 52 52 52   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Sound Level (PWL)                | Cooling                         | dB(A)   | 65 65 67 67 69 69 70 70 70 70   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      |                                  | Heating                         | dB(A)   | 65 65 67 67 69 69 70 70 70 70   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Operating Current (max)          |                                 | A   | 13.0 13.0 19.0 19.0 26.5 8.0 26.5 9.5 28.0 13.0   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Breaker Size                     |                                 | A   | 16 16 25 25 32 16 32 16 40 16   |   |               |                 |                 |                 |                 |                 |              |              |      |
| Ext. Piping                          | Diameter                         | Liquid / Gas                    | mm  | 6.35 / 12.7 6.35 / 12.7 9.52 / 15.88 9.52 / 15.88 9.52 / 15.88 9.52 / 15.88 9.52 / 15.88 9.52 / 15.88 9.52 / 15.88 9.52 / 15.88 |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Max. Length                      | Out-In                          | m   | 50 50 50 50 75 75 75 75 75 75   |   |               |                 |                 |                 |                 |                 |              |              |      |
|                                      | Max. Height                      | Out-In                          | m   | 30 30 30 30 30 30 30 30 30 30   |   |               |                 |                 |                 |                 |                 |              |              |      |
| Guaranteed Operating Range [Outdoor] |                                  |                                 | Cooling*3   | °C  | −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 −15 ~ +46 |               |                 |                 |                 |                 |                 |              |              |      |
|                                      |                                  |                                 | Heating   | °C  | −11 ~ +21 −11 ~ +21 −20 ~ +21 −20 ~ +21 −20 ~ +21 −20 ~ +21 −20 ~ +21 −20 ~ +21 −20 ~ +21 −20 ~ +21 |               |                 |                 |                 |                 |                 |              |              |      |

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO<sub>2</sub>, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C. \*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PLZ-P SERIES

## STANDARD INVERTER



| Type                               |                                      |                                 | Inverter Heat Pump   |                       |                   |                        |                   |                   |                   |      |  |
|------------------------------------|--------------------------------------|---------------------------------|----------------------|-----------------------|-------------------|------------------------|-------------------|-------------------|-------------------|------|--|
| Indoor Unit                        |                                      |                                 | PLA-ZRP100BA         |                       | PLA-ZRP125BA      |                        | PLA-ZRP140BA      |                   |                   |      |  |
| Outdoor Unit                       |                                      |                                 | PUHZ-P100VHA4        | PUHZ-P100YHA2         | PUHZ-P125VHA3     | PUHZ-P125YHA           | PUHZ-P140VHA3     | PUHZ-P140YHA      |                   |      |  |
| Refrigerant                        |                                      |                                 | R410A*1              |                       |                   |                        |                   |                   |                   |      |  |
| Power Supply                       | Source                               |                                 | Outdoor power supply |                       |                   |                        |                   |                   |                   |      |  |
| Outdoor (V/Phase/Hz)               |                                      |                                 | 230 / Single / 50    | 400 / Three / 50      | 230 / Single / 50 | 400 / Three / 50       | 230 / Single / 50 | 400 / Three / 50  |                   |      |  |
| Cooling                            | Capacity                             | Rated                           | kW                   | 9.4                   | 9.4               | 12.3                   | 12.3              | 13.6              | 13.6              |      |  |
|                                    |                                      | Min - Max                       | kW                   | 4.9 - 11.2            | 4.9 - 11.2        | 5.5 - 14.0             | 5.5 - 14.0        | 5.5 - 15.0        | 5.5 - 15.0        |      |  |
|                                    | Total Input                          | Rated                           | kW                   | 3.082                 | 3.082             | 4.020                  | 4.020             | 5.171             | 5.171             |      |  |
|                                    | EER                                  |                                 |                      | -                     | -                 | 3.06                   | 3.06              | 2.63              | 2.63              |      |  |
|                                    | EEL Rank                             |                                 |                      | -                     | -                 | B                      | B                 | D                 | D                 |      |  |
|                                    | Design Load                          |                                 | kW                   | 9.4                   | 9.4               | -                      | -                 | -                 | -                 |      |  |
|                                    | Annual Electricity Consumption*2     |                                 | kWh/a                | 610                   | 610               | -                      | -                 | -                 | -                 |      |  |
|                                    | SEER                                 |                                 |                      | 5.4                   | 5.4               | -                      | -                 | -                 | -                 |      |  |
|                                    | Energy Efficiency Class              |                                 |                      | A                     | A                 | -                      | -                 | -                 | -                 |      |  |
|                                    | Capacity                             | Rated                           | kW                   | 11.2                  | 11.2              | 14.0                   | 14.0              | 16.0              | 16.0              |      |  |
| Heating (Average Season)           |                                      | Min - Max                       | kW                   | 4.5 - 12.5            | 4.5 - 12.5        | 5.0 - 16.0             | 5.0 - 16.0        | 5.0 - 18.0        | 5.0 - 18.0        |      |  |
|                                    | Total Input                          | Rated                           | kW                   | 3.137                 | 3.137             | 3.989                  | 3.989             | 4.938             | 4.938             |      |  |
|                                    | COP                                  |                                 |                      | -                     | -                 | 3.51                   | 3.51              | 3.24              | 3.24              |      |  |
|                                    | EEL Rank                             |                                 |                      | -                     | -                 | B                      | B                 | C                 | C                 |      |  |
|                                    | Design Load                          |                                 | kW                   | 8.0                   | 8.0               | -                      | -                 | -                 | -                 |      |  |
|                                    | Declared Capacity                    | at reference design temperature | kW                   | 6.3 (-10°C)           | 6.3 (-10°C)       | -                      | -                 | -                 | -                 |      |  |
|                                    |                                      | at bivalent temperature         | kW                   | 7.1 (-7°C)            | 7.1 (-7°C)        | -                      | -                 | -                 | -                 |      |  |
|                                    |                                      | at operation limit temperature  | kW                   | 5.0 (-15°C)           | 5.0 (-15°C)       | -                      | -                 | -                 | -                 |      |  |
|                                    | Back Up Heating Capacity             |                                 | kW                   | 1.7                   | 1.7               | -                      | -                 | -                 | -                 |      |  |
|                                    | Annual Electricity Consumption*2     |                                 | kWh/a                | 2800                  | 2800              | -                      | -                 | -                 | -                 |      |  |
|                                    | SCOP                                 |                                 |                      | 4.0                   | 4.0               | -                      | -                 | -                 | -                 |      |  |
|                                    | Energy Efficiency Class              |                                 |                      | A+                    | A+                | -                      | -                 | -                 | -                 |      |  |
|                                    | Operating Current (max)              |                                 |                      |                       |                   |                        |                   |                   |                   |      |  |
|                                    | Indoor Unit                          | Input                           | Rated                | kW                    | 28.7              | 13.7                   | 28.8              | 13.8              | 30.6              | 14.1 |  |
|                                    |                                      | Operating Current (max)         |                      | kW                    | 0.08              | 0.08                   | 0.09              | 0.09              | 0.12              | 0.12 |  |
| Dimensions <Panel>                 |                                      | H x W x D                       | mm                   |                       |                   | 298 - 840 - 840        | <35 - 950 - 950>  |                   |                   |      |  |
| Weight <Panel>                     |                                      |                                 | kg                   | 26 <6>                | 26 <6>            | 27 <6>                 | 27 <6>            | 27 <6>            | 27 <6>            |      |  |
| Air Volume [L/G-Mi2-Mi1-Hi]        |                                      |                                 | m³/min               | 20 - 23 - 26 - 30     | 20 - 23 - 26 - 30 | 22 - 25 - 28 - 31      | 22 - 25 - 28 - 31 | 24 - 26 - 29 - 32 | 24 - 26 - 29 - 32 |      |  |
| Sound Level (SPL) [L/G-Mi2-Mi1-Hi] |                                      |                                 | dB(A)                | 32 - 34 - 37 - 40     | 32 - 34 - 37 - 40 | 34 - 36 - 39 - 41      | 34 - 36 - 39 - 41 | 36 - 39 - 42 - 44 | 36 - 39 - 42 - 44 |      |  |
| Sound Level (PWL)                  |                                      |                                 | dB(A)                | 65                    | 65                | 66                     | 66                | 70                | 70                |      |  |
| Dimensions                         |                                      | H x W x D                       | mm                   | 943 - 950 - 330 (+30) |                   | 1350 - 950 - 330 (+30) |                   |                   |                   |      |  |
| Weight                             |                                      |                                 | kg                   | 75                    | 77                | 99                     | 101               | 99                | 101               |      |  |
| Air Volume                         |                                      | Cooling                         | m³/min               | 60.0                  | 60.0              | 100.0                  | 100.0             | 100.0             | 100.0             |      |  |
|                                    | Heating                              | m³/min                          | 60.0                 | 60.0                  | 100.0             | 100.0                  | 100.0             | 100.0             |                   |      |  |
| Sound Level (SPL)                  | Cooling                              | dB(A)                           | 50                   | 50                    | 51                | 51                     | 52                | 52                |                   |      |  |
|                                    | Heating                              | dB(A)                           | 54                   | 54                    | 55                | 55                     | 56                | 56                |                   |      |  |
| Sound Level (PWL)                  | Cooling                              | dB(A)                           | 70                   | 70                    | 71                | 71                     | 73                | 73                |                   |      |  |
|                                    | Heating                              | dB(A)                           | 74                   | 74                    | 75                | 75                     | 77                | 77                |                   |      |  |
| Operating Current (max)            |                                      | A                               | 28.0                 | 13.0                  | 28.0              | 13.0                   | 29.5              | 13.0              |                   |      |  |
| Breaker Size                       |                                      | A                               | 32                   | 16                    | 32                | 16                     | 40                | 16                |                   |      |  |
| Ext. Piping                        | Diameter                             | Liquid / Gas                    | mm                   | 9.52 / 15.88          | 9.52 / 15.88      | 9.52 / 15.88           | 9.52 / 15.88      | 9.52 / 15.88      | 9.52 / 15.88      |      |  |
|                                    | Max. Length                          | Out-In                          | m                    | 50                    | 50                | 50                     | 50                | 50                | 50                |      |  |
|                                    | Max. Height                          | Out-In                          | m                    | 30                    | 30                | 30                     | 30                | 30                | 30                |      |  |
|                                    | Guaranteed Operating Range [Outdoor] | Cooling*3                       | °C                   | -15 ~ +46             | -15 ~ +46         | -15 ~ +46              | -15 ~ +46         | -15 ~ +46         | -15 ~ +46         |      |  |
|                                    |                                      | Heating                         | °C                   | -15 ~ +21             | -15 ~ +21         | -15 ~ +21              | -15 ~ +21         | -15 ~ +21         | -15 ~ +21         |      |  |

# PKA SERIES

The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (RP35-RP100 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Series is the answer to your air conditioning needs.

PKA-RP35/50HAL

PKA-RP60/71/100KAL




## Flat Panel & Pure White Finish

A flat panel layout has been adopted for all models. Pursuing a design that harmonizes with virtually any interior, the unit colour has been changed from white to pure white.




## Compact Indoor Units

Indoor unit width has been reduced by as much as 510mm (RP100). Units take up much less space, greatly increasing installation possibilities.



\*Compared to PKA-RP35/50GAL

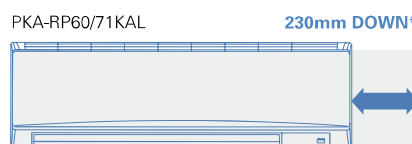


\*Compared to PKA-RP60/71FAL



\*Compared to PKA-RP100FAL


## ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

Highly efficient indoor unit heat exchangers and newly designed power inverters (PUHZ-ZRP) contribute to an amazing reduction in electricity consumption throughout a year, and have resulted in models in the full-capacity range attaining the rank A, A+ and A++ energy savings rating.

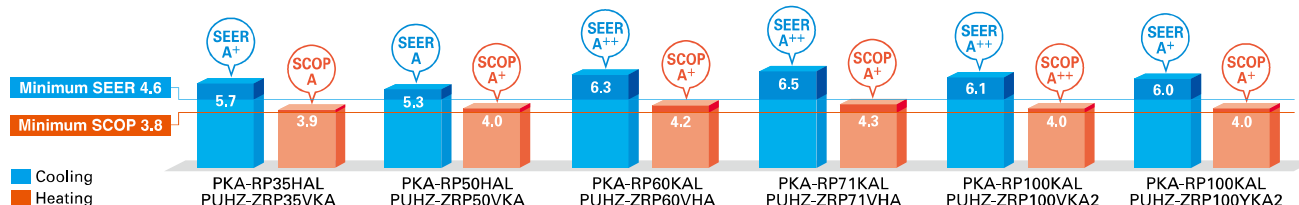

## Drain Pump Option Available with All Models

Installation of the drain pump enables a drain outlet as high as 800mm above the base of the indoor unit. Drain water can be discharged easily even if the surface where the wall-mounted unit does not have direct access outside, increasing the degree of freedom for installation.

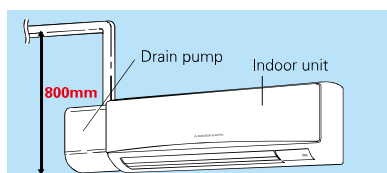

## Multi-function Wired Remote Controller

In addition to using the wireless remote controller that comes as standard equipment, PAR-31MAA and PAC-YT52CRA wired remote controllers can be used as well.

\* Connection to PAR-31MAA/PAC-YT52CRA requires PAC-SH29TC-E (optional).

### Main Functions

- Night Setback
- Energy-saving Mode
- Multi Language
- Weekly Timer
- Refrigerant Leak Check

\* For details, please refer to pages 23-26.



## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit



PKA-RP35/50HAL



PKA-RP60/71/100KAL

#### Outdoor Unit

For Single



PUAH-ZRP35/50



PUAH-ZRP60/71



PUAH-ZRP100

For Multi  
(Twin/Triple/Quadruple)



PUAH-ZRP71



PUAH-ZRP100/125/140/200/250

#### Remote Controller



Optional (\*)



Optional (\*)



### Standard Inverter Series



#### Indoor Unit



PKA-RP35/50HAL



PKA-RP60/71/100KAL

#### Outdoor Unit

For Single



PUAH-P100

For Multi  
(Twin/Triple/Quadruple)



PUAH-P100



PUAH-P125/140



PUAH-P200/250

#### Remote Controller



Optional (\*)



Optional (\*)



(\*) PAC-SH29TC-E is required (optional)

### PKZ-RP HA/KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

| Indoor Unit Combination    |                   | Outdoor Unit Capacity |      |      |      |       |     |     |     |     |             |             |      |      |             |             |             |             |      |               |              |  |
|----------------------------|-------------------|-----------------------|------|------|------|-------|-----|-----|-----|-----|-------------|-------------|------|------|-------------|-------------|-------------|-------------|------|---------------|--------------|--|
|                            |                   | For Single            |      |      |      |       |     |     |     |     | For Twin    |             |      |      |             |             | For Triple  |             |      | For Quadruple |              |  |
|                            |                   | 35                    | 50   | 60   | 71   | 100   | 125 | 140 | 200 | 250 | 71          | 100         | 125  | 140  | 200         | 250         | 140         | 200         | 250  | 200           | 250          |  |
| Power Inverter (PUHZ-ZRP)  |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | —   | —   | —   | —   | 35x2        | 50x2        | 60x2 | 71x2 | 100x2       | —           | 50x3        | 60x3        | 71x3 | 50x4          | 60x4         |  |
|                            | Distribution Pipe | —                     | —    | —    | —    | —     | —   | —   | —   | —   | MSDD-50TR-E |             |      |      | MSDD-50MR-E | —           | MSDT-111R-E |             |      | MSDF-1111R-E  |              |  |
| Standard Inverter (PUHZ-P) |                   | —                     | —    | —    | —    | 100x1 | —   | —   | —   | —   | —           | 50x2        | 60x2 | 71x2 | 100x2       | —           | 50x3        | 60x3        | 71x3 | 50x4          | 60x4         |  |
|                            | Distribution Pipe | —                     | —    | —    | —    | —     | —   | —   | —   | —   | —           | MSDD-50TR-E |      |      |             | MSDD-50MR-E | —           | MSDT-111R-E |      |               | MSDF-1111R-E |  |

# PKZ-RP SERIES

## POWER INVERTER



| Type   |  |                                 |                     | Inverter Heat Pump                                |           |               |           |               |           |               |           |                  |  |
|--|--|---------------------------------|---------------------|---|-----------|---------------|-----------|---------------|-----------|---------------|-----------|------------------|--|
| Indoor Unit                                  |  |                                 |                     | PKA-RP35HAL                                       |           | PKA-RP50HAL   |           | PKA-RP60KAL   |           | PKA-RP71KAL   |           | PKA-RP100KAL     |  |
| Outdoor Unit                                 |  |                                 |                     | PUHZ-ZRP35VKA                                     |           | PUHZ-ZRP50VKA |           | PUHZ-ZRP60VHA |           | PUHZ-ZRP71VHA |           | PUHZ-ZRP100VKA2  |  |
| Refrigerant                                  |  |                                 |                     | R410A* <sup>1</sup>                               |           |               |           |               |           |               |           |                  |  |
| Power Supply                                 | Source                                       |                                 |                     | Outdoor power supply                              |           |               |           |               |           |               |           |                  |  |
|  | Outdoor (V/Phase/Hz)                         |                                 |                     | VKA - VHA:230 / Single / 50, YKA:400 / Three / 50 |           |               |           |               |           |               |           |                  |  |
| Cooling                                      | Capacity                                     | Rated                           | kW                  | 3.6   |           | 4.6           |           | 6.1           |           | 7.1           |           | 9.5              |  |
|  |  | Min - Max                       | kW                  | 1.6 - 4.5   |           | 2.3 - 5.6     |           | 2.7 - 6.7     |           | 3.3 - 8.1     |           | 4.9 - 11.4       |  |
|  | Total Input                                  | Rated                           | kW                  | 0.94  |           | 1.41          |           | 1.60          |           | 1.80          |           | 2.40             |  |
|  | EER  |                                 |                     | —   |           | —             |           | —             |           | —             |           | —                |  |
|  | EEL Rank                                     |                                 |                     | —   |           | —             |           | —             |           | —             |           | —                |  |
|  | Design Load                                  |                                 | kW                  | 3.6   |           | 4.6           |           | 6.1           |           | 7.1           |           | 9.5              |  |
|  | Annual Electricity Consumption* <sup>2</sup> |                                 | kWh/a               | 221   |           | 304           |           | 336           |           | 391           |           | 539              |  |
|  | SEER   |                                 |                     | 5.7   |           | 5.3           |           | 6.3           |           | 6.5           |           | 6.1              |  |
|  | Energy Efficiency Class                      |                                 |                     | A+  |           | A             |           | A++           |           | A++           |           | A++              |  |
|  |  |                                 |                     | —   |           | —             |           | —             |           | —             |           | —                |  |
| Heating (Average Season)                     | Capacity                                     | Rated                           | kW                  | 4.1   |           | 5.0           |           | 7.0           |           | 8.0           |           | 11.2             |  |
|  |  | Min - Max                       | kW                  | 1.6 - 5.2   |           | 2.5 - 7.3     |           | 2.8 - 8.2     |           | 3.5 - 10.2    |           | 4.5 - 14.0       |  |
|  | Total Input                                  | Rated                           | kW                  | 1.07  |           | 1.50          |           | 1.96          |           | 2.19          |           | 3.04             |  |
|  | COP  |                                 |                     | —   |           | —             |           | —             |           | —             |           | —                |  |
|  | EEL Rank                                     |                                 |                     | —   |           | —             |           | —             |           | —             |           | —                |  |
|  | Design Load                                  |                                 | kW                  | 2.4   |           | 3.3           |           | 4.4           |           | 4.7           |           | 7.8              |  |
|  | Declared Capacity                            | at reference design temperature | kW                  | 2.4 (-10°C)                                       |           | 3.3 (-10°C)   |           | 4.4 (-10°C)   |           | 4.7 (-10°C)   |           | 7.8 (-10°C)      |  |
|  |  | at bivalent temperature         | kW                  | 2.4 (-10°C)                                       |           | 3.3 (-10°C)   |           | 4.4 (-10°C)   |           | 4.7 (-10°C)   |           | 7.8 (-10°C)      |  |
|  |  | at operation limit temperature  | kW                  | 2.2 (-11°C)                                       |           | 3.2 (-11°C)   |           | 2.8 (-20°C)   |           | 3.5 (-20°C)   |           | 5.8 (-20°C)      |  |
|  | Back Up Heating Capacity                     |                                 | kW                  | 0   |           | 0             |           | 0             |           | 0             |           | 0                |  |
| Annual Electricity Consumption* <sup>2</sup> |  | kWh/a                           | 847                 |   | 1160      |               | 1473      |               | 1532      |               | 2608      |                  |  |
| SCOP   |  |                                 | 3.9                 |   | A+        |               | 4.2       |               | 4.3       |               | 4.1       |                  |  |
| Energy Efficiency Class                      |  |                                 | A                   |   | A         |               | A+        |               | A+        |               | A+        |                  |  |
| Operating Current (max)                      |  | A                               | 13.4                |   | 13.4      |               | 19.4      |               | 19.4      |               | 27.1      |                  |  |
|  | Input  | Rated                           | kW                  | 0.04  |           | 0.04          |           | 0.06          |           | 0.06          |           | 0.08             |  |
| Indoor Unit                                  | Operating Current (max)                      | A                               | 0.4                 |   | 0.4       |               | 0.43      |               | 0.43      |               | 0.57      |                  |  |
|  | Dimensions <Panel> Weight <Panel>            | H × W × D                       | mm                  | 295 - 898 - 249                                   |           | 13            |           | 21            |           | 21            |           | 365 - 1170 - 295 |  |
| Outdoor Unit                                 | Air Volume [Lo-Mid-Hi]                       |                                 | m <sup>3</sup> /min | 9 - 10.5 - 12                                     |           | 9 - 10.5 - 12 |           | 18 - 20 - 22  |           | 18 - 20 - 22  |           | 20 - 23 - 26     |  |
|  | Sound Level (SPL) [Lo-Mid-Hi]                |                                 | dB(A)               | 36 - 40 - 43                                      |           | 36 - 40 - 43  |           | 39 - 42 - 45  |           | 39 - 42 - 45  |           | 41 - 45 - 49     |  |
|  | Sound Level (PWL)                            |                                 | dB(A)               | 60  |           | 60            |           | 64            |           | 64            |           | 65               |  |
|  | Dimensions                                   | H × W × D                       | mm                  | 630 - 809 - 300                                   |           | 46            |           | 67            |           | 67            |           | 116              |  |
|  | Weight                                       |                                 | kg                  | 43  |           | 46            |           | 67            |           | 67            |           | 123              |  |
|  | Air Volume                                   | Cooling                         | m <sup>3</sup> /min | 45.0  |           | 45.0          |           | 55.0          |           | 55.0          |           | 110.0            |  |
|  |  | Heating                         | m <sup>3</sup> /min | 45.0  |           | 45.0          |           | 55.0          |           | 55.0          |           | 110.0            |  |
|  | Sound Level (SPL)                            | Cooling                         | dB(A)               | 44  |           | 44            |           | 47            |           | 47            |           | 49               |  |
|  |  | Heating                         | dB(A)               | 46  |           | 46            |           | 48            |           | 48            |           | 51               |  |
|  | Sound Level (PWL)                            | Cooling                         | dB(A)               | 65  |           | 65            |           | 67            |           | 67            |           | 69               |  |
| Operating Current (max)                      | A  |                                 | 13.0                |   | 13.0      |               | 19.0      |               | 19.0      |               | 26.5      |                  |  |
| Ext. Piping                                  | Breaker Size                                 | A                               | 16                  |   | 16        |               | 25        |               | 25        |               | 32        |                  |  |
|  | Diameter                                     | Liquid / Gas                    | mm                  | 6.35 / 12.7                                       |           | 6.35 / 12.7   |           | 9.52 / 15.88  |           | 9.52 / 15.88  |           | 9.52 / 15.88     |  |
|  | Max. Length                                  | Out-In                          | m                   | 50  |           | 50            |           | 50            |           | 50            |           | 75               |  |
|  | Max. Height                                  | Out-In                          | m                   | 30  |           | 30            |           | 30            |           | 30            |           | 30               |  |
| Guaranteed Operating Range [Outdoor]         | Cooling* <sup>3</sup>                        | °C                              | -15 ~ +46           |   | -15 ~ +46 |               | -15 ~ +46 |               | -15 ~ +46 |               | -15 ~ +46 |                  |  |
|  |  | °C                              | -11 ~ +21           |   | -11 ~ +21 |               | -20 ~ +21 |               | -20 ~ +21 |               | -20 ~ +21 |                  |  |


\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C. \*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PKZ-P SERIES

## STANDARD INVERTER



| Type   |  |                                 |                       | Inverter Heat Pump  |                       |                  |
|--|--|---------------------------------|-----------------------|---------------------|-----------------------|------------------|
| Indoor Unit                                  |  |                                 |                       | PKA-RP100KAL        |                       |                  |
| Outdoor Unit                                 |  |                                 |                       | PUHZ-P100YHA2       |                       |                  |
| Refrigerant                                  |  |                                 |                       | R410A* <sup>1</sup> |                       |                  |
| Power Supply                                 | Source Outdoor (V/Phase/Hz)                  |                                 |                       | 230 / Single / 50   |                       | 400 / Three / 50 |
| Cooling                                      | Capacity                                     | Rated                           | kW                    | 9.4                 |                       | 9.4              |
|  |  | Min - Max                       | kW                    | 4.9 - 11.2          |                       | 4.9 - 11.2       |
|  | Total Input                                  | Rated                           | kW                    | 3.120               |                       | 3.120            |
|  | Design Load                                  |                                 | kW                    | 9.4                 |                       | 9.4              |
|  | Annual Electricity Consumption* <sup>2</sup> | kWh/a                           | 686                   |                     | 686                   |                  |
|  | SEER   |                                 | 4.8                   |                     | 4.8                   |                  |
|  |  | Energy Efficiency Class         | B                     |                     | B                     |                  |
|  | Heating (Average Season)                     | Capacity                        | Rated                 | kW                  | 11.2                  |                  |
| Min - Max                                    |  |                                 | kW                    | 4.5 - 12.5          |                       | 4.5 - 12.5       |
| Total Input                                  |  | Rated                           | kW                    | 3.490               |                       | 3.490            |
| Design Load                                  |  |                                 | kW                    | 7.0                 |                       | 7.0              |
| Declared Capacity                            |  | at reference design temperature | kW                    | 5.6 (–10°C)         |                       | 5.6 (–10°C)      |
|  |  | at bivalent temperature         | kW                    | 6.2 (–7°C)          |                       | 6.2 (–7°C)       |
|  |  | at operation limit temperature  | kW                    | 4.5 (–15°C)         |                       | 4.5 (–15°C)      |
| Back Up Heating Capacity                     |  |                                 | kW                    | 1.4                 |                       | 1.4              |
| Annual Electricity Consumption* <sup>2</sup> |  | kWh/a                           | 2579                  |                     | 2579                  |                  |
| SCOP   |  |                                 | 3.8                   |                     | 3.8                   |                  |
|  | Energy Efficiency Class                      | A                               |                       | A                   |                       |                  |
| Operating Current (max)                      |  |                                 | A                     | 28.6                |                       | 13.6             |
| Indoor Unit                                  | Input  | Rated                           | kW                    | 0.08                |                       | 0.08             |
|  |  | Operating Current (max)         | A                     | 0.57                |                       | 0.57             |
|  | Dimensions <Panel>                           | H × W × D                       | mm                    | 365 - 1170 - 295    |                       |                  |
|  | Weight <Panel>                               |                                 | kg                    | 21                  |                       | 21               |
|  | Air Volume [Lo-Mid-Hi]                       |                                 | m <sup>3</sup> /min   | 20 - 23 - 26        |                       | 20 - 23 - 26     |
|  | Sound Level (SPL) [Lo-Mid-Hi]                |                                 | dB(A)                 | 41 - 45 - 49        |                       | 41 - 45 - 49     |
|  | Sound Level (PWL)                            |                                 | dB(A)                 | 65                  |                       | 65               |
|  | Outdoor Unit                                 | Dimensions                      | H × W × D             | mm                  | 943 - 950 - 330 (+30) |                  |
| Weight                                       |  |                                 | kg                    | 75                  |                       | 77               |
| Air Volume                                   |  | Cooling                         | m <sup>3</sup> /min   | 60.0                |                       | 60.0             |
|  |  | Heating                         | m <sup>3</sup> /min   | 60.0                |                       | 60.0             |
| Sound Level (SPL)                            |  | Cooling                         | dB(A)                 | 50                  |                       | 50               |
|  |  | Heating                         | dB(A)                 | 54                  |                       | 54               |
| Sound Level (PWL)                            |  | Cooling                         | dB(A)                 | 70                  |                       | 70               |
| Operating Current (max)                      |  |                                 | A                     | 28.0                |                       | 13.0             |
| Breaker Size                                 |  |                                 | A                     | 32                  |                       | 16               |
| Ext. Piping                                  |  | Diameter                        | Liquid / Gas          | mm                  | 9.52 / 15.88          |                  |
|  | Max. Length                                  | Out-In                          | m                     | 50                  |                       | 50               |
|  | Max. Height                                  | Out-In                          | m                     | 30                  |                       | 30               |
| Guaranteed Operating Range [Outdoor]         |  |                                 | Cooling* <sup>3</sup> | °C                  | –15 ~ +46             | –15 ~ +46        |
|  |  |                                 | Heating               | °C                  | –15 ~ +21             | –15 ~ +21        |

# PCA-KA SERIES

PCA-RP35/50/60/71/100/125/140KAQ



A stylish new indoor unit design and airflow settings for both high- and low-ceiling interiors expand installation possibilities. Together with exceptional energy-saving performance, these units are the solution to diversified air conditioning needs.

## Stylish Indoor Unit Design

A stylish square-like design is adopted for the indoor units of all models. As a result, the units blend in better with the ceiling.




PCA-GA



PCA-KAQ

## ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++


A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of newly designed Power Inverter series (PUHZ-ZRP) and resulting in the full capacity models comply ErP Lot 10 with energy ranking A+/A++ for cooling and A/A+ for heating. This contributes to an impressive reduction in the cost of annual electricity.

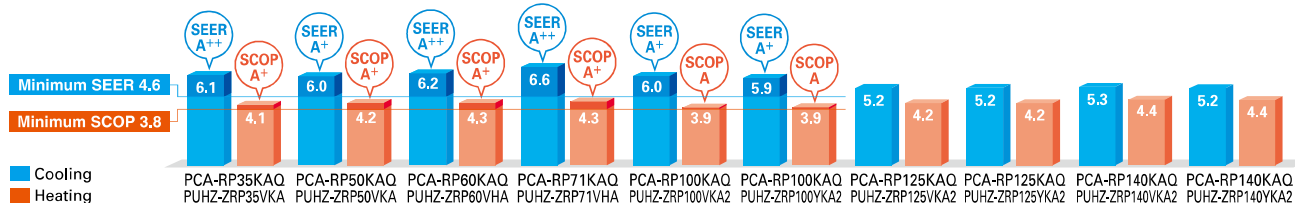

\* For products with capacity over 10.0kW, SEER/SCOP values are measured based on EN14825. These values are for reference purposes only.


## Optional Drain Pump for Full-capacity Models

The pumping height of the optional drain pump has been increased from 400mm to 600mm, expanding flexibility in choosing unit location during installation work.




## Outside-air Intake

Units are equipped with a knock-out hole that enables the induction of fresh outside-air.

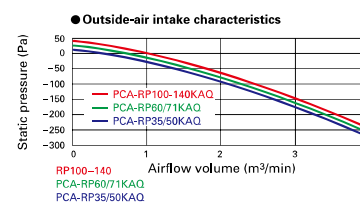

## Equipped with Automatic Air-speed Adjustment

In addition to the conventional 4-speed setting, units are now equipped with an automatic air-speed adjustment mode. This setting automatically adjusts the air-speed to conditions that match the room environment. At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

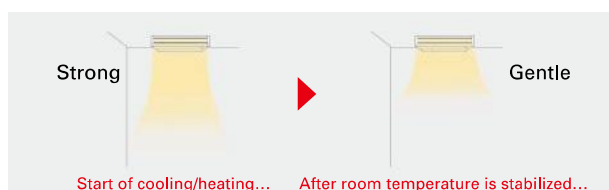

## Equipped with High- /Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

| Capacity | High ceiling | Standard ceiling | Low ceiling |
|----------|--------------|------------------|-------------|
| 35       | 3.5m         | 2.7m             | 2.5m        |
| 50       | 3.5m         | 2.7m             | 2.5m        |
| 60       | 3.5m         | 2.7m             | 2.5m        |
| 71       | 3.5m         | 2.7m             | 2.5m        |
| 100      | 4.2m         | 3.0m             | 2.6m        |
| 125      | 4.2m         | 3.0m             | 2.6m        |
| 140      | 4.2m         | 3.0m             | 2.6m        |



# PCA-HA SERIES

PCA-RP71HAQ



Standard features include a strong carbon-black stainless steel body and built-in oil mist filter to prevent oil from getting into the unit providing a comfortable air conditioning environment in kitchens that use open-flame cooking.



## Tough on Oily Smoke

A durable stainless steel casing that is resistant to oil and grease is provided to protect the surface of the body. Grimy dirt and stains are removed easily, enabling the unit to be kept clean at all times.

## High-performance Oil Mist Filter


A high-performance heavy-duty oil mist filter is included as standard equipment. The filtering system is more efficient than conventional filters, thereby effectively reducing the oily smoke entering the air conditioner. The filter is disposable, thereby enabling trouble-free cleaning and maintenance.

### Oil Mist Filter Cleaning

When used in kitchens, the oil mist filter should be replaced once every two months. The system comes with 12 filters elements. After these have been used, optional elements (PAC-SG38KF-E) can be purchased.



Oil mist filter



Pull the handle to easily slide the filter out


## Easy Maintenance – Even for Cleaning the Fan

A separate fan casing that can be disassembled in sections is adopted to ensure easy fan cleaning. Drain pan cleaning onsite is also no problem owing to the use of a pipe connector that is easily removed.




## Cosmetic Front and Hanging Fixture Covers (Option)

Cosmetic covers are available to prevent the collection of dust and grime on the main body and hanging fixture sections.

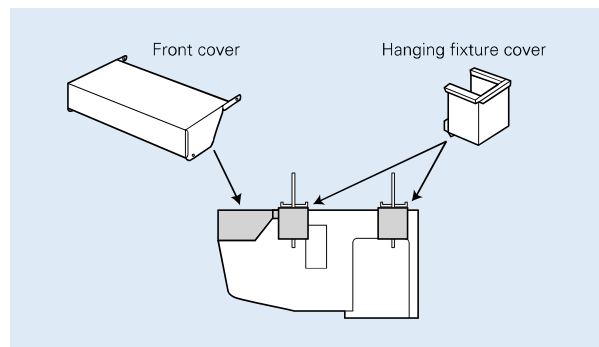

## Fresh Outside-air Intake (Option)

There is a knock-out opening on the rear panel of the unit that can be used to bring fresh air into the unit. This helps to improve ventilation and make the kitchen comfortable.

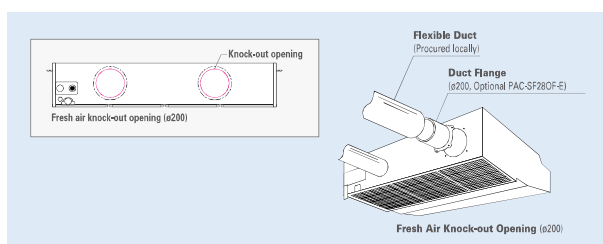

- Notes: 1) A fresh-air duct flange is required (sold separately)  
2) Intake air is not 100% fresh (outside) air.

## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit



PCA-RP35/50/60/71/100/125/140KAQ

#### Outdoor Unit

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140

For Multi  
(Twin/Triple/Quadruple)



PUHZ-ZRP100/125/140/200/250

#### Remote Controller



Optional



Optional



Optional

### Standard Inverter Series



#### Indoor Unit



PCA-RP35/50/60/71/100/125/140KAQ

#### Outdoor Unit

For Single



SUZ-KA35



SUZ-KA50/60/71



PUHZ-P100



PUHZ-P125/140

For Multi  
(Twin/Triple/  
Quadruple)



PUHZ-P100



PUHZ-P125/140



PUHZ-P200/250

#### Remote Controller



Optional



Optional



Optional

### PCZ-RP KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

| Indoor Unit Combination        |                   | Outdoor Unit Capacity |      |      |      |       |       |       |     |     |          |             |      |      |             |       |             |      |      |               |      |
|--------------------------------|-------------------|-----------------------|------|------|------|-------|-------|-------|-----|-----|----------|-------------|------|------|-------------|-------|-------------|------|------|---------------|------|
|                                |                   | For Single            |      |      |      |       |       |       |     |     | For Twin |             |      |      |             |       | For Triple  |      |      | For Quadruple |      |
|                                |                   | 35                    | 50   | 60   | 71   | 100   | 125   | 140   | 200 | 250 | 71       | 100         | 125  | 140  | 200         | 250   | 140         | 200  | 250  | 200           | 250  |
| Power Inverter (PUHZ-ZRP)      |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | —   | —   | 35x2     | 50x2        | 60x2 | 71x2 | 100x2       | 125x2 | 50x3        | 60x3 | 71x3 | 50x4          | 60x4 |
|                                | Distribution Pipe | —                     | —    | —    | —    | —     | —     | —     | —   | —   | —        | MSDD-50TR-E |      |      | MSDD-50WR-E |       | MSDT-111R-E |      |      | MSDF-1111R-E  |      |
| Standard Inverter (PUHZ-P&SUZ) |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | —   | —   | —        | 50x2        | 60x2 | 71x2 | 100x2       | 125x2 | 50x3        | 60x3 | 71x3 | 50x4          | 60x4 |
|                                | Distribution Pipe | —                     | —    | —    | —    | —     | —     | —     | —   | —   | —        | MSDD-50TR-E |      |      | MSDD-50WR-E |       | MSDT-111R-E |      |      | MSDF-1111R-E  |      |

## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit



PCA-RP71HAQ

#### Outdoor Unit

For Single



PUHZ-ZRP71

For Multi (Twin/Triple)



PUHZ-ZRP140/250

#### Remote Controller



Optional



Optional



Optional

### PCZ-RP HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

| Indoor Unit Combination    |                   | Outdoor Unit Capacity |    |    |      |     |     |     |     |     |          |     |             |     |     |     |            |             |     |               |     |
|----------------------------|-------------------|-----------------------|----|----|------|-----|-----|-----|-----|-----|----------|-----|-------------|-----|-----|-----|------------|-------------|-----|---------------|-----|
|                            |                   | For Single            |    |    |      |     |     |     |     |     | For Twin |     |             |     |     |     | For Triple |             |     | For Quadruple |     |
|                            |                   | 35                    | 50 | 60 | 71   | 100 | 125 | 140 | 200 | 250 | 71       | 100 | 125         | 140 | 200 | 250 | 140        | 200         | 250 | 200           | 250 |
| Power Inverter (PUHZ-ZRP)  |                   | —                     | —  | —  | 71x1 | —   | —   | —   | —   | —   | —        | —   | 71x2        | —   | —   | —   | —          | 71x3        | —   | —             |     |
|                            | Distribution Pipe | —                     | —  | —  | —    | —   | —   | —   | —   | —   | —        | —   | MSDD-50TR-E | —   | —   | —   | —          | MSDD-50TR-E | —   | —             |     |
| Standard Inverter (PUHZ-P) |                   | —                     | —  | —  | —    | —   | —   | —   | —   | —   | —        | —   | 71x2        | —   | —   | —   | —          | 71x3        | —   | —             |     |
|                            | Distribution Pipe | —                     | —  | —  | —    | —   | —   | —   | —   | —   | —        | —   | MSDD-50TR-E | —   | —   | —   | —          | MSDD-50TR-E | —   | —             |     |

# PCZ-RP KA SERIES

## POWER INVERTER



| Type                                 |  |                                 | Inverter Heat Pump  |                 |                 |                       |                       |                         |                         |                         |                         |                         |
|--------------------------------------|--|---------------------------------|---|-----------------|-----------------|-----------------------|-----------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Indoor Unit                          |  |                                 | PCA-RP35KAQ   | PCA-RP50KAQ     | PCA-RP60KAQ     | PCA-RP71KAQ           | PCA-RP100KAQ          |                         | PCA-RP125KAQ            |                         | PCA-RP140KAQ            |                         |
| Outdoor Unit                         |  |                                 | PUHZ-ZRP35VKA   | PUHZ-ZRP50VKA   | PUHZ-ZRP60VHA   | PUHZ-ZRP71VHA         | PUHZ-ZRP100VKA2       | PUHZ-ZRP100YKA2         | PUHZ-ZRP125VKA2         | PUHZ-ZRP125YKA2         | PUHZ-ZRP140VKA2         | PUHZ-ZRP140YKA2         |
| Refrigerant                          |  |                                 | R410A <sup>*1</sup>   |                 |                 |                       |                       |                         |                         |                         |                         |                         |
| Power Supply                         |  |                                 | Outdoor power supply<br>VKA · VHA 230 / Single / 50, YKA 400 / Three / 50 |                 |                 |                       |                       |                         |                         |                         |                         |                         |
| Cooling                              | Capacity                                     | Rated                           | kW  | 3.6             | 5.0             | 6.1                   | 7.1                   | 9.5                     | 9.5                     | 12.5                    | 12.5                    | 13.4                    |
|                                      |  | Min - Max                       | kW  | 1.6 - 4.5       | 2.3 - 5.6       | 2.7 - 6.7             | 3.3 - 8.1             | 4.9 - 11.4              | 4.9 - 11.4              | 5.5 - 14.0              | 5.5 - 14.0              | 6.2 - 15.0              |
|                                      | Total Input                                  | Rated                           | kW  | 0.86            | 1.34            | 1.66                  | 1.82                  | 2.42                    | 2.42                    | 3.98                    | 3.98                    | 3.95                    |
|                                      | EER  |                                 |   | —               | —               | —                     | —                     | —                       | —                       | 3.14                    | 3.14                    | 3.39                    |
|                                      |  | EEL Rank                        |   | —               | —               | —                     | —                     | —                       | —                       | —                       | —                       | —                       |
|                                      | Design Load                                  |                                 | kW  | 3.6             | 5.0             | 6.1                   | 7.1                   | 9.5                     | 9.5                     | 12.5                    | 12.5                    | 13.4                    |
|                                      | Annual Electricity Consumption <sup>*2</sup> |                                 | kWh/a   | 206             | 292             | 347                   | 375                   | 553                     | 560                     | 834                     | 844                     | 893                     |
|                                      | SEER   |                                 |   | 6.1             | 6.0             | 6.2                   | 6.6                   | 6.0                     | 5.9                     | 5.2 <sup>**</sup>       | 5.2 <sup>**</sup>       | 5.3 <sup>**</sup>       |
|                                      |  | Energy Efficiency Class         |   | A++             | A+              | A++                   | A++                   | A+                      | A+                      | —                       | —                       | —                       |
|                                      | Capacity                                     | Rated                           | kW  | 4.1             | 5.5             | 7.0                   | 8.0                   | 11.2                    | 11.2                    | 14.0                    | 14.0                    | 16.0                    |
| Heating (Average Season)             |  | Min - Max                       | kW  | 1.6-5.2         | 2.5 - 6.6       | 2.8 - 8.2             | 3.5 - 10.2            | 4.5 - 14.0              | 4.5 - 14.0              | 5.0 - 16.0              | 5.0 - 16.0              | 5.7 - 18.0              |
|                                      | Total Input                                  | Rated                           | kW  | 1.02            | 1.45            | 1.93                  | 2.20                  | 3.04                    | 3.04                    | 3.80                    | 3.80                    | 4.57                    |
|                                      | COP  |                                 |   | —               | —               | —                     | —                     | —                       | —                       | 3.68                    | 3.68                    | 3.50                    |
|                                      |  | EEL Rank                        |   | —               | —               | —                     | —                     | —                       | —                       | —                       | —                       | —                       |
|                                      | Design Load                                  |                                 | kW  | 2.4             | 3.8             | 4.4                   | 4.7                   | 7.8                     | 7.8                     | 9.3                     | 9.3                     | 10.6                    |
|                                      | Declared Capacity                            | at reference design temperature | kW  | 2.4 (-10°C)     | 3.8 (-10°C)     | 4.4 (-10°C)           | 4.7 (-10°C)           | 7.8 (-10°C)             | 7.8 (-10°C)             | 9.3 (-10°C)             | 9.3 (-10°C)             | 10.6 (-10°C)            |
|                                      |  | at bivalent temperature         | kW  | 2.4 (-10°C)     | 3.8 (-10°C)     | 4.4 (-10°C)           | 4.7 (-10°C)           | 7.8 (-10°C)             | 7.8 (-10°C)             | 9.3 (-10°C)             | 9.3 (-10°C)             | 10.6 (-10°C)            |
|                                      |  | at operation limit temperature  | kW  | 2.2 (-11°C)     | 3.7 (-11°C)     | 2.8 (-20°C)           | 3.5 (-20°C)           | 5.8 (-20°C)             | 5.8 (-20°C)             | 7.0 (-20°C)             | 7.0 (-20°C)             | 7.9 (-20°C)             |
|                                      | Back Up Heating Capacity                     |                                 | kW  | 0               | 0               | 0                     | 0                     | 0                       | 0                       | 0                       | 0                       | 0                       |
|                                      | Annual Electricity Consumption <sup>*2</sup> |                                 | kWh/a   | 815             | 1257            | 1458                  | 1519                  | 2837                    | 2837                    | 3097                    | 3097                    | 3366                    |
| Operating Current (max)              |  | SCOP                            |   | 4.1             | 4.2             | 4.3                   | 4.3                   | 3.9                     | 3.9                     | 4.2 <sup>**</sup>       | 4.2 <sup>**</sup>       | 4.4 <sup>**</sup>       |
|                                      |  | Energy Efficiency Class         |   | A+              | A+              | A+                    | A+                    | A                       | A                       | —                       | —                       | —                       |
|                                      | Input  | Rated                           | kW  | 13.3            | 13.4            | 19.4                  | 19.4                  | 27.2                    | 27.2                    | 30.9                    | 30.9                    | 32.9                    |
|                                      | Operating Current (max)                      |                                 | A   | 0.04            | 0.05            | 0.06                  | 0.06                  | 0.09                    | 0.09                    | 0.11                    | 0.11                    | 0.14                    |
|                                      | Dimensions <Panel>                           | H × W × D                       | mm  | 230 - 960 - 680 | 230 - 960 - 680 | 230 - 1280 - 680      | 230 - 1280 - 680      | 230 - 1600 - 680        | 230 - 1600 - 680        | 230 - 1600 - 680        | 230 - 1600 - 680        | 230 - 1600 - 680        |
|                                      | Weight <Panel>                               |                                 | kg  | 24              | 25              | 32                    | 32                    | 36                      | 36                      | 38                      | 38                      | 39                      |
|                                      | Air Volume [Lo-Mi2-Mi1-Hi]                   |                                 | m³/min  | 10-11-12-14     | 10-11-13-15     | 15-16-17-19           | 16-17-18-20           | 22-24-26-28             | 22-24-26-28             | 23-25-27-29             | 23-25-27-29             | 24-26-29-32             |
|                                      | Sound Level (SPL) [Lo-Mi2-Mi1-Hi]            |                                 | dB(A)   | 31-33-36-39     | 32-34-37-40     | 33-35-37-40           | 35-37-39-41           | 37-39-41-43             | 37-39-41-43             | 39-41-43-45             | 39-41-43-45             | 41-43-45-48             |
|                                      | Sound Level (PWL)                            |                                 | dB(A)   | 60              | 60              | 60                    | 62                    | 63                      | 63                      | 65                      | 65                      | 68                      |
|                                      | Dimensions                                   | H × W × D                       | mm  | 630 - 809 - 300 | 630 - 809 - 300 | 943 - 950 - 330 (+30) | 943 - 950 - 330 (+30) | 1338 - 1050 - 330 (+30) | 1338 - 1050 - 330 (+30) | 1338 - 1050 - 330 (+30) | 1338 - 1050 - 330 (+30) | 1338 - 1050 - 330 (+30) |
| Outdoor Unit                         | Weight                                       |                                 | kg  | 43              | 46              | 67                    | 67                    | 116                     | 123                     | 116                     | 125                     | 131                     |
|                                      | Air Volume                                   | Cooling                         | m³/min  | 45.0            | 45.0            | 55.0                  | 55.0                  | 110.0                   | 110.0                   | 120.0                   | 120.0                   | 120.0                   |
|                                      |  | Heating                         | m³/min  | 45.0            | 45.0            | 55.0                  | 55.0                  | 110.0                   | 110.0                   | 120.0                   | 120.0                   | 120.0                   |
|                                      | Sound Level (SPL)                            | Cooling                         | dB(A)   | 44              | 44              | 47                    | 47                    | 49                      | 49                      | 50                      | 50                      | 50                      |
|                                      |  | Heating                         | dB(A)   | 46              | 46              | 48                    | 48                    | 51                      | 51                      | 52                      | 52                      | 52                      |
|                                      | Sound Level (PWL)                            | Cooling                         | dB(A)   | 65              | 65              | 67                    | 67                    | 69                      | 69                      | 70                      | 70                      | 70                      |
|                                      |  | Heating                         | dB(A)   | 66              | 66              | 68                    | 68                    | 71                      | 71                      | 72                      | 72                      | 72                      |
|                                      | Operating Current (max)                      |                                 | A   | 13.0            | 13.0            | 19.0                  | 19.0                  | 26.5                    | 26.5                    | 9.5                     | 9.5                     | 13.0                    |
|                                      | Breaker Size                                 |                                 | A   | 16              | 16              | 25                    | 25                    | 32                      | 32                      | 16                      | 16                      | 16                      |
|                                      | Diameter                                     | Liquid / Gas                    | mm  | 6.35 / 12.7     | 6.35 / 12.7     | 9.52 / 15.88          | 9.52 / 15.88          | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            |
| Ext. Piping                          | Max. Length                                  | Out-In                          | m   | 50              | 50              | 50                    | 50                    | 75                      | 75                      | 75                      | 75                      | 75                      |
|                                      |  | Out-In                          | m   | 30              | 30              | 30                    | 30                    | 30                      | 30                      | 30                      | 30                      | 30                      |
|                                      | Max. Height                                  |                                 | m   | 30              | 30              | 30                    | 30                    | 30                      | 30                      | 30                      | 30                      | 30                      |
| Guaranteed Operating Range [Outdoor] |  |                                 | Cooling <sup>*3</sup>   | °C              | -15 ~ +46       | -15 ~ +46             | -15 ~ +46             | -15 ~ +46               | -15 ~ +46               | -15 ~ +46               | -15 ~ +46               | -15 ~ +46               |
|                                      |  |                                 | Heating   | °C              | -11 ~ +21       | -11 ~ +21             | -20 ~ +21             | -20 ~ +21               | -20 ~ +21               | -20 ~ +21               | -20 ~ +21               | -20 ~ +21               |

<sup>\*1</sup> Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

<sup>\*2</sup> Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>\*3</sup> Optional air protection guide is required where ambient temperature is lower than -5°C. <sup>\*4</sup> SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PCZ-P KA SERIES

## STANDARD INVERTER



| Type                                 |  |                                 | Inverter Heat Pump   |                 |             |              |                         |                         |                         |                         |                         |                         |                        |  |
|--------------------------------------|--|---------------------------------|--|-----------------|-------------|--------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------------------------|--|
| Indoor Unit                          |  |                                 | PCA-RP35KAQ  | PCA-RP50KAQ     | PCA-RP60KAQ | PCA-RP71KAQ  | PCA-RP100KAQ            |                         | PCA-RP125KAQ            |                         | PCA-RP140KAQ            |                         |                        |  |
| Outdoor Unit                         |  |                                 | SUZ-KA35VA4  | SUZ-KA50VA4     | SUZ-KA60VA4 | SUZ-KA71VA4  | PUHZ-P100VHA4           | PUHZ-P100YHA2           | PUHZ-P125VHA3           | PUHZ-P125YHA            | PUHZ-P140VHA3           | PUHZ-P140YHA            |                        |  |
| Refrigerant                          |  |                                 | R410A* <sup>1</sup>  |                 |             |              |                         |                         |                         |                         |                         |                         |                        |  |
| Power Supply                         | Source                                       |                                 | Outdoor power supply                                       |                 |             |              |                         |                         |                         |                         |                         |                         |                        |  |
| Outdoor (V/Phase/Hz)                 |  |                                 | VA4・VHA3・VHA4:230 / Single / 50, YHA・YHA2:400 / Three / 50 |                 |             |              |                         |                         |                         |                         |                         |                         |                        |  |
| Cooling                              | Capacity                                     | Rated                           | kW   | 3.6             | 5.0         | 5.7          | 7.1                     | 9.4                     | 9.4                     | 12.3                    | 12.3                    | 13.6                    | 13.6                   |  |
|                                      |  | Min - Max                       | kW   | 1.4 - 3.9       | 2.3 - 5.6   | 2.3 - 6.3    | 2.8 - 8.1               | 4.9 - 11.2              | 4.9 - 11.2              | 5.5 - 14.0              | 5.5 - 14.0              | 5.5 - 15.0              | 5.5 - 15.0             |  |
|                                      | Total Input                                  | Rated                           | kW   | 1.050           | 1.550       | 1.720        | 2.060                   | 3.130                   | 3.130                   | 4.090                   | 4.090                   | 4.840                   | 4.840                  |  |
|                                      | EER  |                                 |  | —               | —           | —            | —                       | —                       | —                       | 3.01                    | 3.01                    | 2.81                    | 2.81                   |  |
|                                      |  | EEL Rank                        |  | —               | —           | —            | —                       | —                       | —                       | B                       | B                       | C                       | C                      |  |
|                                      | Design Load                                  |                                 | kW   | 3.6             | 5.0         | 5.7          | 7.1                     | 9.4                     | 9.4                     | —                       | —                       | —                       | —                      |  |
|                                      | Annual Electricity Consumption* <sup>2</sup> |                                 | kWh/a  | 214             | 307         | 332          | 414                     | 645                     | 645                     | —                       | —                       | —                       | —                      |  |
|                                      | SEER   |                                 |  | 5.9             | 5.7         | 6.0          | 6.0                     | 5.1                     | 5.1                     | —                       | —                       | —                       | —                      |  |
|                                      |  | Energy Efficiency Class         |  | A+              | A+          | A+           | A+                      | A                       | A                       | —                       | —                       | —                       | —                      |  |
|                                      | Capacity                                     | Rated                           | kW   | 4.1             | 5.5         | 6.9          | 7.9                     | 11.2                    | 11.2                    | 14.0                    | 14.0                    | 16.0                    | 16.0                   |  |
| Heating (Average Season)             |  | Min - Max                       | kW   | 1.7 - 5.0       | 1.7 - 6.6   | 2.5 - 8.0    | 2.6 - 10.2              | 4.5 - 12.5              | 4.5 - 12.5              | 5.0 - 16.0              | 5.0 - 16.0              | 5.0 - 18.0              | 5.0 - 18.0             |  |
|                                      | Total Input                                  | Rated                           | kW   | 1.130           | 1.520       | 1.910        | 2.180                   | 3.280                   | 3.280                   | 4.120                   | 4.120                   | 4.690                   | 4.690                  |  |
|                                      | COP  |                                 |  | —               | —           | —            | —                       | —                       | —                       | 3.40                    | 3.40                    | 3.41                    | 3.41                   |  |
|                                      |  | EEL Rank                        |  | —               | —           | —            | —                       | —                       | —                       | C                       | C                       | B                       | B                      |  |
|                                      | Design Load                                  |                                 | kW   | 2.6             | 4.0         | 4.8          | 5.8                     | 8.0                     | 8.0                     | —                       | —                       | —                       | —                      |  |
|                                      | Declared Capacity                            | at reference design temperature | kW   | 2.3 (-10°C)     | 3.6 (-10°C) | 4.3 (-10°C)  | 5.2 (-10°C)             | 6.3 (-10°C)             | 6.3 (-10°C)             | —                       | —                       | —                       | —                      |  |
|                                      |  | at bivalent temperature         | kW   | 2.3 (-7°C)      | 3.6 (-7°C)  | 4.3 (-7°C)   | 5.2 (-7°C)              | 7.1 (-7°C)              | 7.1 (-7°C)              | —                       | —                       | —                       | —                      |  |
|                                      |  | at operation limit temperature  | kW   | 2.3 (-10°C)     | 3.6 (-10°C) | 4.3 (-10°C)  | 5.2 (-10°C)             | 5.0 (-15°C)             | 5.0 (-15°C)             | —                       | —                       | —                       | —                      |  |
|                                      | Back Up Heating Capacity                     |                                 | kW   | 0.3             | 0.4         | 0.5          | 0.6                     | 1.7                     | 1.7                     | —                       | —                       | —                       | —                      |  |
|                                      | Annual Electricity Consumption* <sup>2</sup> |                                 | kWh/a  | 887             | 1398        | 1678         | 2028                    | 2945                    | 2945                    | —                       | —                       | —                       | —                      |  |
| SCOP                                 |  |                                 | 4.1  | 4.0             | 4.0         | 4.0          | 3.8                     | 3.8                     | —                       | —                       | —                       | —                       |                        |  |
|                                      | Energy Efficiency Class                      |                                 | A+   | A+              | A+          | A+           | A                       | A                       | —                       | —                       | —                       | —                       |                        |  |
| Operating Current (max)              |  | A                               | 8.5  | 12.4            | 14.4        | 16.5         | 28.7                    | 28.7                    | 28.8                    | 13.8                    | 30.4                    | 13.9                    |                        |  |
| Indoor Unit                          | Input  | Rated                           | kW   | 0.04            | 0.05        | 0.06         | 0.06                    | 0.09                    | 0.09                    | 0.11                    | 0.11                    | 0.14                    | 0.14                   |  |
|                                      | Operating Current (max)                      |                                 | A  | 0.29            | 0.37        | 0.39         | 0.42                    | 0.65                    | 0.65                    | 0.76                    | 0.76                    | 0.90                    | 0.90                   |  |
|                                      | Dimensions <Panel>                           | H × W × D                       | mm   | 230-960-680     |             |              | 230-1280-680            |                         |                         | 230-1600-680            |                         |                         |                        |  |
|                                      | Weight <Panel>                               |                                 | kg   | 24              | 25          | 32           | 32                      | 36                      | 36                      | 38                      | 38                      | 39                      | 39                     |  |
|                                      | Air Volume [Lo-Mi2-Mi1-Hi]                   |                                 | m³/min   | 10-11-12-14     | 10-11-13-15 | 15-16-17-19  | 16-17-18-20             | 22-24-26-28             | 22-24-26-28             | 23-25-27-29             | 23-25-27-29             | 24-26-29-32             | 24-26-29-32            |  |
|                                      | Sound Level (SPL) [Lo-Mi2-Mi1-Hi]            |                                 | dB(A)  | 31-33-36-39     | 32-34-37-40 | 33-35-37-40  | 35-37-39-41             | 37-39-41-43             | 37-39-41-43             | 39-41-43-45             | 39-41-43-45             | 41-43-45-48             | 41-43-45-48            |  |
|                                      | Sound Level (PWL)                            |                                 | dB(A)  | 60              | 60          | 60           | 62                      | 63                      | 63                      | 65                      | 65                      | 68                      | 68                     |  |
|                                      | Dimensions                                   | H × W × D                       | mm   | 550 - 800 - 285 |             |              | 880 - 840 - 330         |                         |                         | 943 - 950 - 330 (+30)   |                         |                         | 1350 - 950 - 330 (+30) |  |
|                                      | Weight                                       |                                 | kg   | 35              | 54          | 50           | 53                      | 75                      | 77                      | 99                      | 101                     | 99                      | 101                    |  |
|                                      | Air Volume                                   | Cooling                         | m³/min   | 36.3            | 44.6        | 40.9         | 50.1                    | 60.0                    | 60.0                    | 100.0                   | 100.0                   | 100.0                   | 100.0                  |  |
| Outdoor Unit                         |  | Heating                         | m³/min   | 34.8            | 44.6        | 49.2         | 48.2                    | 60.0                    | 60.0                    | 100.0                   | 100.0                   | 100.0                   | 100.0                  |  |
|                                      | Sound Level (SPL)                            | Cooling                         | dB(A)  | 49              | 52          | 55           | 55                      | 50                      | 50                      | 51                      | 51                      | 52                      | 52                     |  |
|                                      |  | Heating                         | dB(A)  | 50              | 52          | 55           | 55                      | 54                      | 54                      | 55                      | 55                      | 56                      | 56                     |  |
|                                      | Sound Level (PWL)                            | Cooling                         | dB(A)  | 62              | 65          | 65           | 69                      | 70                      | 71                      | 71                      | 73                      | 73                      | 73                     |  |
|                                      |  | Heating                         | dB(A)  | 62              | 65          | 65           | 69                      | 70                      | 70                      | 71                      | 71                      | 73                      | 73                     |  |
|                                      | Operating Current (max)                      |                                 | A  | 8.2             | 12.0        | 14.0         | 16.1                    | 28.0                    | 28.0                    | 13.0                    | 13.0                    | 29.5                    | 13.0                   |  |
|                                      | Breaker Size                                 |                                 | A  | 10              | 20          | 20           | 20                      | 32                      | 32                      | 16                      | 16                      | 40                      | 16                     |  |
|                                      | Diameter                                     | Liquid / Gas                    | mm   | 6.35 / 9.52     | 6.35 / 12.7 | 6.35 / 15.88 | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88            | 9.52 / 15.88           |  |
|                                      | Max. Length                                  | Out-In                          | m  | 20              | 30          | 30           | 30                      | 50                      | 50                      | 50                      | 50                      | 50                      | 50                     |  |
|                                      | Max. Height                                  | Out-In                          | m  | 12              | 30          | 30           | 30                      | 30                      | 30                      | 30                      | 30                      | 30                      | 30                     |  |
| Guaranteed Operating Range [Outdoor] | Cooling                                      | °C                              | -10 ~ +24  | -15 ~ +46       | -15 ~ +46   | -15 ~ +46    | -15 ~ +46* <sup>3</sup> | -15 ~ +46* <sup>3</sup> | -15 ~ +46* <sup>3</sup> | -15 ~ +46* <sup>3</sup> | -15 ~ +46* <sup>3</sup> | -15 ~ +46* <sup>3</sup> |                        |  |
|                                      | Heating                                      | °C                              | -10 ~ +24  | -10 ~ +24       | -10 ~ +24   | -10 ~ +24    | -15 ~ +21               | -15 ~ +21               | -15 ~ +21               | -15 ~ +21               | -15 ~ +21               | -15 ~ +21               |                        |  |

# PCZ-RP HA SERIES

## POWER INVERTER



| Type                     |                                      |                                 |        | Inverter Heat Pump    |  |
|--------------------------|--------------------------------------|---------------------------------|--------|-----------------------|--|
| Indoor Unit              |                                      |                                 |        | PCA-RP71HAQ           |  |
| Outdoor Unit             |                                      |                                 |        | PUHZ-ZRP71VHA         |  |
| Refrigerant              |                                      |                                 |        | R410A*1               |  |
| Power Supply             |                                      |                                 |        | Outdoor power supply  |  |
| Cooling                  |                                      |                                 |        | 230 / Single / 50     |  |
| Cooling                  | Capacity                             | Rated                           | kW     | 7.1                   |  |
|                          |                                      | Min - Max                       | kW     | 3.3 - 8.1             |  |
|                          | Total Input                          | Rated                           | kW     | 2.17                  |  |
|                          | EER                                  |                                 |        | -                     |  |
|                          | EEL Rank                             |                                 |        | -                     |  |
|                          | Design Load                          |                                 | kW     | 7.1                   |  |
|                          | Annual Electricity Consumption*2     |                                 | kWh/a  | 447                   |  |
|                          | SEER                                 |                                 |        | 5.6                   |  |
|                          | Energy Efficiency Class              |                                 |        | A+                    |  |
|                          | Capacity                             | Rated                           | kW     | 7.6                   |  |
| Heating (Average Season) | Total Input                          | Min - Max                       | kW     | 3.5 - 10.2            |  |
|                          |                                      | Rated                           | kW     | 2.35                  |  |
|                          | COP                                  |                                 |        | -                     |  |
|                          | EEL Rank                             |                                 |        | -                     |  |
|                          | Design Load                          |                                 | kW     | 4.7                   |  |
|                          | Declared Capacity                    | at reference design temperature | kW     | 4.7 (-10°C)           |  |
|                          |                                      | at bivalent temperature         | kW     | 4.7 (-10°C)           |  |
|                          |                                      | at operation limit temperature  | kW     | 3.5 (-20°C)           |  |
|                          | Back Up Heating Capacity             |                                 | kW     | 0                     |  |
|                          | Annual Electricity Consumption*2     |                                 | kWh/a  | 1751                  |  |
| SCOP                     |                                      |                                 |        | 3.3                   |  |
| Energy Efficiency Class  |                                      |                                 |        | A                     |  |
| Operating Current (max)  |                                      |                                 |        | 19.4                  |  |
| Indoor Unit              | Input                                | Rated                           | kW     | 0.09                  |  |
|                          | Operating Current (max)              |                                 | A      | 0.43                  |  |
|                          | Dimensions <Panel>                   | H x W x D                       | mm     | 280 - 1136 - 650      |  |
|                          | Weight <Panel>                       |                                 | kg     | 41                    |  |
|                          | Air Volume [Lo-Hi]                   |                                 | m³/min | 17 - 19               |  |
|                          | Sound Level (SPL) [Lo-Hi]            |                                 | dB(A)  | 34 - 38               |  |
|                          | Sound Level (PWL)                    |                                 | dB(A)  | 56                    |  |
| Outdoor Unit             | Dimensions                           | H x W x D                       | mm     | 943 - 950 - 330 (+30) |  |
|                          | Weight                               |                                 | kg     | 67                    |  |
|                          | Air Volume                           | Cooling                         | m³/min | 55.0                  |  |
|                          |                                      | Heating                         | m³/min | 55.0                  |  |
|                          | Sound Level (SPL)                    | Cooling                         | dB(A)  | 47                    |  |
|                          |                                      | Heating                         | dB(A)  | 48                    |  |
|                          | Sound Level (PWL)                    | Cooling                         | dB(A)  | 67                    |  |
|                          | Operating Current (max)              |                                 | A      | 19.0                  |  |
|                          | Breaker Size                         |                                 | A      | 25                    |  |
|                          | Diameter                             | Liquid / Gas                    | mm     | 9.52 / 15.88          |  |
| Ext. Piping              | Max. Length                          | Out-In                          | m      | 50                    |  |
|                          | Max. Height                          | Out-In                          | m      | 30                    |  |
|                          | Guaranteed Operating Range [Outdoor] | Cooling*3                       | °C     | -15 ~ +46             |  |
|                          |                                      |                                 |        | Heating               |  |
|                          |                                      |                                 |        | -20 ~ +21             |  |

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

# PSA SERIES


Installation of this floor-standing series is easy and quick.  
An excellent choice when there is a sudden need for an air conditioner to be installed.



## Quick and Easy Installation, Space-saving and Design That Compliments Any Interior


The floor-standing indoor unit is mounted on the floor, enabling quick installation. Its compact body requires only minimal space.

### ● PSA-RP71KA

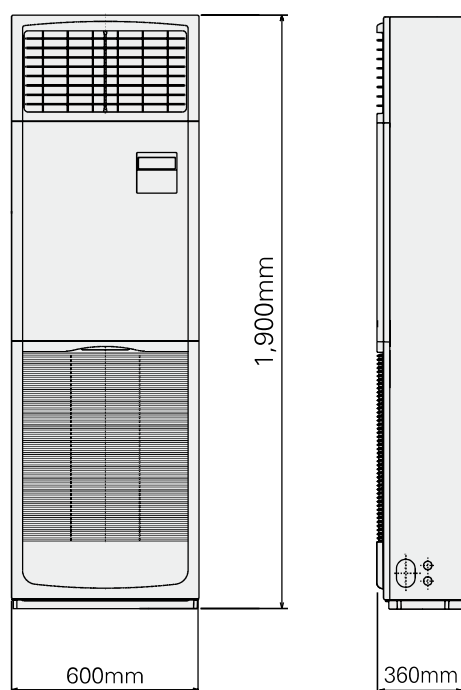

### 4-way pipe work connections enable greater freedom in installation

Remarkable freedom in choosing installation sites is allowed by providing piping connection to the indoor unit in four places: left side, back, from underneath and on the right side of the unit. Even installation in the corner of a room is easy.

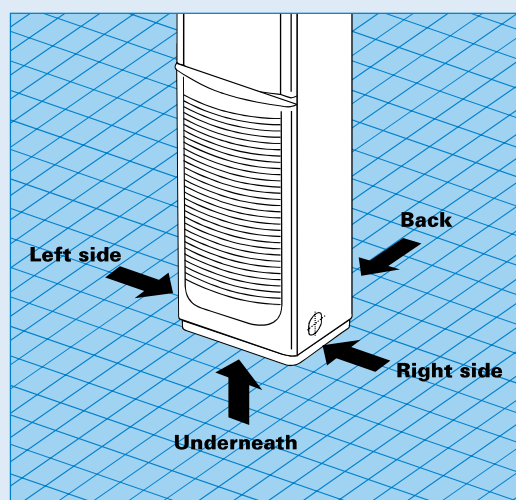

## Built-in Remote Controller

### Easy Operation with Built-in PAR-21MAA Remote Controller

Icon, letter and number visibility are improved with the adoption of a dot liquid-crystal display (LCD), and operation management functions have been increased.

### Main Functions

- Multi-Language Display
- Limited Temperature Range Setting
- Auto-off Timer
- Operation Lock
- Weekly Timer





## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit

PSA-RP71/100/125/140KA



#### Outdoor Unit

For Single



PUAZ-ZRP71



PUAZ-ZRP100/125/140

For Multi (Twin/Triple)



PUAZ-ZRP140/200/250

#### Remote Controller



Built-in

### Standard Inverter Series



#### Indoor Unit

PSA-RP71/100/125/140KA



#### Outdoor Unit

For Single



PUAZ-P100



PUAZ-P125/140

For Multi (Twin/Triple)



PUAZ-P140



PUAZ-P200/250

#### Remote Controller




Built-in

### PSZ-RP KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

| Indoor Unit Combination    |                   | Outdoor Unit Capacity |    |    |      |       |       |       |     |     |          |     |     |             |             |       |            |             |      |               |     |
|----------------------------|-------------------|-----------------------|----|----|------|-------|-------|-------|-----|-----|----------|-----|-----|-------------|-------------|-------|------------|-------------|------|---------------|-----|
|                            |                   | For Single            |    |    |      |       |       |       |     |     | For Twin |     |     |             |             |       | For Triple |             |      | For Quadruple |     |
|                            |                   | 35                    | 50 | 60 | 71   | 100   | 125   | 140   | 200 | 250 | 71       | 100 | 125 | 140         | 200         | 250   | 140        | 200         | 250  | 200           | 250 |
| Power Inverter (PUHZ-ZRP)  |                   | —                     | —  | —  | 71x1 | 100x1 | 125x1 | 140x1 | —   | —   | —        | —   | —   | 71x2        | 100x2       | 125x2 | —          | —           | 71x3 | —             | —   |
|                            | Distribution Pipe | —                     | —  | —  | —    | —     | —     | —     | —   | —   | —        | —   | —   | MSDD-50TR-E | MSDD-50WR-E | —     | —          | MSDT-11TR-E | —    | —             |     |
| Standard Inverter (PUHZ-P) |                   | —                     | —  | —  | —    | 100x1 | 125x1 | 140x1 | —   | —   | —        | —   | —   | 71x2        | 100x2       | 125x2 | —          | —           | 71x3 | —             | —   |
|                            | Distribution Pipe | —                     | —  | —  | —    | —     | —     | —     | —   | —   | —        | —   | —   | MSDD-50TR-E | MSDD-50WR-E | —     | —          | MSDT-11TR-E | —    | —             |     |

# PSZ-RP SERIES

## POWER INVERTER



| Type                       |                                  |                                 | Inverter Heat Pump                                |                  |                 |                 |                  |                 |                 |              |
|----------------------------|----------------------------------|---------------------------------|---|------------------|-----------------|-----------------|------------------|-----------------|-----------------|--------------|
| Indoor Unit                |                                  |                                 | PSA-RP71KA  | PSA-RP100KA      |                 | PSA-RP125KA     |                  | PSA-RP140KA     |                 |              |
| Outdoor Unit               |                                  |                                 | PUHZ-ZRP71VHA                                     | PUHZ-ZRP100VKA2  | PUHZ-ZRP100YKA2 | PUHZ-ZRP125VKA2 | PUHZ-ZRP125YKA2  | PUHZ-ZRP140VKA2 | PUHZ-ZRP140YKA2 |              |
| Refrigerant                |                                  |                                 | R410A*1   |                  |                 |                 |                  |                 |                 |              |
| Power Supply               |                                  |                                 | Outdoor power supply                              |                  |                 |                 |                  |                 |                 |              |
| Source                     |                                  |                                 | VKA • VHA-230 / Single / 50, YKA-400 / Three / 50 |                  |                 |                 |                  |                 |                 |              |
| Outdoor (V/Phase/Hz)       |                                  |                                 |   |                  |                 |                 |                  |                 |                 |              |
| Cooling                    | Capacity                         | Rated                           | kW  | 7.1              | 9.5             | 9.5             | 12.5             | 12.5            | 13.4            | 13.4         |
|                            |                                  | Min - Max                       | kW  | 3.3 - 8.1        | 4.9 - 11.4      | 4.9 - 11.4      | 5.5 - 14.0       | 5.5 - 14.0      | 6.2 - 15.0      | 6.2 - 15.0   |
|                            | Total Input                      | Rated                           | kW  | 1.89             | 2.50            | 2.50            | 4.09             | 4.09            | 4.06            | 4.06         |
|                            | EER                              |                                 |   | —                | —               | —               | 3.06             | 3.06            | 3.30            | 3.30         |
|                            | EEL Rank                         |                                 |   | —                | —               | —               | —                | —               | —               | —            |
|                            | Design Load                      | Rated                           | kW  | 7.1              | 9.5             | 9.5             | 12.5             | 12.5            | 13.4            | 13.4         |
|                            | Annual Electricity Consumption*2 |                                 | kWh/a   | 396              | 595             | 606             | 847              | 885             | 872             | 883          |
|                            | SEER                             |                                 |   | 6.3              | 5.6             | 5.5             | 5.0*4            | 4.9*4           | 5.3*4           | 5.3*4        |
|                            | Energy Efficiency Class          |                                 |   | A++              | A+              | A               | —                | —               | —               | —            |
|                            | Capacity                         | Rated                           | kW  | 7.6              | 11.2            | 11.2            | 14.0             | 14.0            | 16.0            | 16.0         |
| Heating (Average Season)   |                                  | Min - Max                       | kW  | 3.5 - 10.2       | 4.5 - 14.0      | 4.5 - 14.0      | 5.0 - 16.0       | 5.0 - 16.0      | 5.7 - 18.0      | 5.7 - 18.0   |
|                            | Total Input                      | Rated                           | kW  | 2.21             | 3.08            | 3.08            | 4.24             | 4.24            | 4.79            | 4.79         |
|                            | COP                              |                                 |   | —                | —               | —               | 3.30             | 3.30            | 3.34            | 3.34         |
|                            | EEL Rank                         |                                 |   | —                | —               | —               | —                | —               | —               | —            |
|                            | Design Load                      | Rated                           | kW  | 4.7              | 7.8             | 7.8             | 9.3              | 9.3             | 10.6            | 10.6         |
|                            | Dclared Capacity                 | at reference design temperature | kW  | 4.7 (-10°C)      | 7.8 (-10°C)     | 7.8 (-10°C)     | 9.3 (-10°C)      | 9.3 (-10°C)     | 10.6 (-10°C)    | 10.6 (-10°C) |
|                            |                                  | at bivalent temperature         | kW  | 4.7 (-10°C)      | 7.8 (-10°C)     | 7.8 (-10°C)     | 9.3 (-10°C)      | 9.3 (-10°C)     | 10.6 (-10°C)    | 10.6 (-10°C) |
|                            |                                  | at operation limit temperature  | kW  | 3.5 (-20°C)      | 5.8 (-20°C)     | 5.8 (-20°C)     | 7.0 (-20°C)      | 7.0 (-20°C)     | 7.9 (-20°C)     | 7.9 (-20°C)  |
|                            | Back Up Heating Capacity         | Rated                           | kW  | 0                | 0               | 0               | 0                | 0               | 0               | 0            |
|                            | Annual Electricity Consumption*2 |                                 | kWh/a   | 1666             | 2761            | 2761            | 3285             | 3285            | 3331            | 3331         |
| Operating Current (max)    | SCOP                             |                                 |   | 4.0              | 4.0             | 4.0             | 4.0*4            | 4.0*4           | 4.4*4           | 4.4*4        |
|                            | Energy Efficiency Class          |                                 |   | A+               | A+              | A+              | —                | —               | —               | —            |
|                            | Input                            | Rated                           | A   | 19.4             | 27.2            | 27.2            | 27.2             | 27.2            | 28.7            | 28.7         |
|                            | Operating Current (max)          |                                 | kW  | 0.06             | 0.11            | 0.11            | 0.11             | 0.11            | 0.11            | 0.11         |
|                            | Dimensions <Panel>               | H x W x D                       | mm  | 46               | 46              | 46              | 1900 - 600 - 360 | 46              | 48              | 48           |
|                            | Weight <Panel>                   |                                 | kg  | 20 - 22 - 24     | 25 - 28 - 30    | 25 - 28 - 30    | 25 - 28 - 31     | 25 - 28 - 31    | 25 - 28 - 31    | 25 - 28 - 31 |
|                            | Air Volume (Lo-Mid-Hi)           |                                 | m³/min  | 40 - 42 - 44     | 45 - 49 - 51    | 45 - 49 - 51    | 45 - 49 - 51     | 45 - 49 - 51    | 45 - 49 - 51    | 45 - 49 - 51 |
|                            | Sound Level (SPL) [Lo-Mid-Hi]    |                                 | dB(A)   | 60               | 65              | 65              | 66               | 66              | 66              | 66           |
|                            | Sound Level (PWL)                |                                 | dB(A)   | 60               | 65              | 65              | 66               | 66              | 66              | 66           |
|                            | Dimensions                       | H x W x D                       | mm  | 943-950-330(+30) | 116             | 123             | 116              | 125             | 118             | 131          |
| Outdoor Unit               | Weight                           |                                 | kg  | 67               | 110.0           | 110.0           | 120.0            | 120.0           | 120.0           | 120.0        |
|                            | Air Volume                       | Cooling                         | m³/min  | 55.0             | 110.0           | 110.0           | 120.0            | 120.0           | 120.0           | 120.0        |
|                            |                                  | Heating                         | m³/min  | 55.0             | 110.0           | 110.0           | 120.0            | 120.0           | 120.0           | 120.0        |
|                            | Sound Level (SPL)                | Cooling                         | dB(A)   | 47               | 49              | 49              | 50               | 50              | 50              | 50           |
|                            |                                  | Heating                         | dB(A)   | 48               | 51              | 51              | 52               | 52              | 52              | 52           |
|                            | Sound Level (PWL)                | Cooling                         | dB(A)   | 67               | 69              | 69              | 70               | 70              | 70              | 70           |
|                            |                                  | Heating                         | dB(A)   | 67               | 69              | 69              | 70               | 70              | 70              | 70           |
|                            | Operating Current (max)          |                                 | A   | 19.0             | 26.5            | 8.0             | 26.5             | 9.5             | 28.0            | 13.0         |
|                            | Breaker Size                     |                                 | A   | 25               | 32              | 16              | 32               | 16              | 40              | 16           |
|                            | Ext. Piping                      | Diameter                        | mm  | 9.52 / 15.88     | 9.52 / 15.88    | 9.52 / 15.88    | 9.52 / 15.88     | 9.52 / 15.88    | 9.52 / 15.88    | 9.52 / 15.88 |
| Guaranteed Operating Range | Max. Length                      | Liquid / Gas                    | m   | 50               | 75              | 75              | 75               | 75              | 75              | 75           |
|                            | Max. Height                      |                                 | m   | 30               | 30              | 30              | 30               | 30              | 30              | 30           |
|                            | Guaranteed Operating Range       | Cooling*3                       | °C  | -15 ~ +46        | -15 ~ +46       | -15 ~ +46       | -15 ~ +46        | -15 ~ +46       | -15 ~ +46       | -15 ~ +46    |
| [Outdoor]                  |                                  |                                 | Heating   | °C               | -20 ~ +21       | -20 ~ +21       | -20 ~ +21        | -20 ~ +21       | -20 ~ +21       | -20 ~ +21    |


\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -8°C. \*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PSZ-P SERIES

## STANDARD INVERTER



| Type                       |                                  |                                 | Inverter Heat Pump   |                  |               |                  |               |              |              |  |
|----------------------------|----------------------------------|---------------------------------|--|------------------|---------------|------------------|---------------|--------------|--------------|--|
| Indoor Unit                |                                  |                                 | PSA-RP100KA  | PSA-RP100KA      | PSA-RP125KA   | PSA-RP125KA      | PSA-RP140KA   | PSA-RP140KA  | PSA-RP140KA  |  |
| Outdoor Unit               |                                  |                                 | PUHZ-P100VHA4  | PUHZ-P100YHA2    | PUHZ-P125VHA3 | PUHZ-P125YHA     | PUHZ-P140VHA3 | PUHZ-P140YHA | PUHZ-P140YHA |  |
| Refrigerant                |                                  |                                 | R410A*1  |                  |               |                  |               |              |              |  |
| Power Supply               |                                  |                                 | Outdoor power supply                                       |                  |               |                  |               |              |              |  |
| Source                     |                                  |                                 | VHA3 • VHA4:230 / Single / 50, YHA • YHA2:400 / Three / 50 |                  |               |                  |               |              |              |  |
| Outdoor (V/Phase/Hz)       |                                  |                                 |  |                  |               |                  |               |              |              |  |
| Cooling                    | Capacity                         | Rated                           | kW   | 9.4              | 9.4           | 12.3             | 12.3          | 13.6         | 13.6         |  |
|                            |                                  | Min - Max                       | kW   | 4.9 - 11.2       | 4.9 - 11.2    | 5.5 - 14.0       | 5.5 - 14.0    | 5.5 - 15.0   | 5.5 - 15.0   |  |
|                            | Total Input                      | Rated                           | kW   | 3,120            | 3,120         | 4,380            | 4,380         | 5,640        | 5,640        |  |
|                            | EER                              |                                 |  | —                | —             | 2.81             | 2.81          | 2.41         | 2.41         |  |
|                            | EEL Rank                         |                                 |  | —                | —             | C                | C             | E            | E            |  |
|                            | Design Load                      | Rated                           | kW   | 9.4              | 9.4           | —                | —             | —            | —            |  |
|                            | Annual Electricity Consumption*2 |                                 | kWh/a  | 716              | 716           | —                | —             | —            | —            |  |
|                            | SEER                             |                                 |  | 4.6              | 4.6           | —                | —             | —            | —            |  |
|                            | Energy Efficiency Class          |                                 |  | B                | B             | —                | —             | —            | —            |  |
|                            | Capacity                         | Rated                           | kW   | 11.2             | 11.2          | 14.0             | 14.0          | 16.0         | 16.0         |  |
| Heating (Average Season)   |                                  | Min - Max                       | kW   | 4.5 - 12.5       | 4.5 - 12.5    | 5.0 - 16.0       | 5.0 - 16.0    | 5.0 - 18.0   | 5.0 - 18.0   |  |
|                            | Total Input                      | Rated                           | kW   | 3,280            | 3,280         | 4,980            | 4,980         | 5,690        | 5,690        |  |
|                            | COP                              |                                 |  | —                | —             | 2.81             | 2.81          | 2.81         | 2.81         |  |
|                            | EEL Rank                         |                                 |  | —                | —             | D                | D             | D            | D            |  |
|                            | Design Load                      | Rated                           | kW   | 8.0              | 8.0           | —                | —             | —            | —            |  |
|                            | Dclared Capacity                 | at reference design temperature | kW   | 6.3 (-10°C)      | 6.3 (-10°C)   | —                | —             | —            | —            |  |
|                            |                                  | at bivalent temperature         | kW   | 7.1 (-7°C)       | 7.1 (-7°C)    | —                | —             | —            | —            |  |
|                            |                                  | at operation limit temperature  | kW   | 5.0 (-15°C)      | 5.0 (-15°C)   | —                | —             | —            | —            |  |
|                            | Back Up Heating Capacity         | Rated                           | kW   | 1.7              | 1.7           | —                | —             | —            | —            |  |
|                            | Annual Electricity Consumption*2 |                                 | kWh/a  | 2945             | 2945          | —                | —             | —            | —            |  |
| Operating Current (max)    | SCOP                             |                                 |  | 3.8              | 3.8           | —                | —             | —            | —            |  |
|                            | Energy Efficiency Class          |                                 |  | A                | A             | —                | —             | —            | —            |  |
|                            | Input                            | Rated                           | A  | 28.7             | 13.7          | 28.7             | 13.7          | 30.2         | 13.7         |  |
|                            | Operating Current (max)          |                                 | kW   | 0.11             | 0.11          | 0.11             | 0.11          | 0.11         | 0.11         |  |
|                            | Dimensions <Panel>               | H x W x D                       | mm   | 46               | 46            | 1900 - 600 - 360 | 46            | 48           | 48           |  |
|                            | Weight <Panel>                   |                                 | kg   | 25 - 28 - 30     | 25 - 28 - 30  | 25 - 28 - 31     | 25 - 28 - 31  | 25 - 28 - 31 | 25 - 28 - 31 |  |
|                            | Air Volume (Lo-Mid-Hi)           |                                 | m³/min   | 45 - 49 - 51     | 45 - 49 - 51  | 45 - 49 - 51     | 45 - 49 - 51  | 45 - 49 - 51 | 45 - 49 - 51 |  |
|                            | Sound Level (SPL) [Lo-Mid-Hi]    |                                 | dB(A)  | 65               | 65            | 66               | 66            | 66           | 66           |  |
|                            | Sound Level (PWL)                |                                 | dB(A)  | 65               | 65            | 66               | 66            | 66           | 66           |  |
|                            | Dimensions                       | H x W x D                       | mm   | 943-950-330(+30) | 77            | 99               | 101           | 99           | 101          |  |
| Outdoor Unit               | Weight                           |                                 | kg   | 75               | 77            | 100.0            | 100.0         | 100.0        | 100.0        |  |
|                            | Air Volume                       | Cooling                         | m³/min   | 60.0             | 60.0          | 100.0            | 100.0         | 100.0        | 100.0        |  |
|                            |                                  | Heating                         | m³/min   | 60.0             | 60.0          | 100.0            | 100.0         | 100.0        | 100.0        |  |
|                            | Sound Level (SPL)                | Cooling                         | dB(A)  | 50               | 50            | 51               | 51            | 52           | 52           |  |
|                            |                                  | Heating                         | dB(A)  | 54               | 54            | 55               | 55            | 56           | 56           |  |
|                            | Sound Level (PWL)                | Cooling                         | dB(A)  | 70               | 70            | 71               | 71            | 73           | 73           |  |
|                            | Operating Current (max)          |                                 | A  | 28.0             | 13.0          | 28.0             | 13.0          | 29.5         | 13.0         |  |
|                            | Breaker Size                     |                                 | A  | 32               | 16            | 32               | 16            | 40           | 16           |  |
|                            | Ext. Piping                      | Diameter                        | mm   | 9.52 / 15.88     | 9.52 / 15.88  | 9.52 / 15.88     | 9.52 / 15.88  | 9.52 / 15.88 | 9.52 / 15.88 |  |
|                            | Max. Length                      | Liquid / Gas                    | m  | 50               | 50            | 50               | 50            | 50           | 50           |  |
| Guaranteed Operating Range | Max. Height                      |                                 | m  | 30               | 30            | 30               | 30            | 30           | 30           |  |
|                            | Guaranteed Operating Range       | Cooling*3                       | °C   | -15 ~ +46        | -15 ~ +46     | -15 ~ +46        | -15 ~ +46     | -15 ~ +46    | -15 ~ +46    |  |
|                            | [Outdoor]                        | Heating                         | °C   | -15 ~ +21        | -15 ~ +21     | -15 ~ +21        | -15 ~ +21     | -15 ~ +21    | -15 ~ +21    |  |

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C. \*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PEAD SERIES


PEAD-RP35/50/60/71/100/125/140JA(L)Q




The thin, ceiling-concealed indoor units of this series are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.

## Compact Indoor Units

The height of the models from 35–140 has been unified to 250mm. Compared to the previous PEAD-RP EA model, the height has been reduced by as much as 75mm (models 100–140), making installation in low ceilings with minimal clearance space possible.

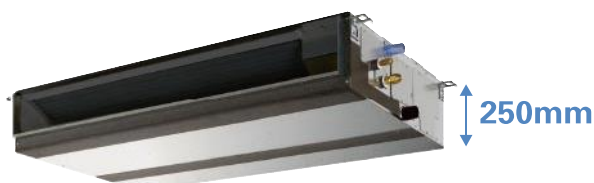

PEAD-RP JA(L)Q



## External Static Pressure


External static pressure conversion can be set up to five stages. Capable of being set to a maximum of 150Pa, units are applicable to a wide range of building types.

■ External static pressure setting

| Series     | 35                 | 50 | 60         | 71                              | 100 | 125 | 140 |
|------------|--------------------|----|------------|---------------------------------|-----|-----|-----|
| PEAD-RP EA | 30/70Pa            |    |            | 70/130 (with optional motor) Pa |     |     |     |
| PEAD-RP GA | –                  | –  | 10/50/70Pa |                                 |     | –   | –   |
| PEAD-RP JA | 35/50/70/100/150Pa |    |            |                                 |     |     |     |

## ErP Lot 10-compliant, Achieving High Energy Efficiency of SEER/SCOP Rank A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of the newly designed Power Inverter Series (PUHZ-ZRP) and resulting in compliance of the full-capacity models with ErP Lot 10 and energy rankings of A+/A++ for cooling and A/A+ for heating. This contributes to an impressive reduction in the cost of annual electricity.

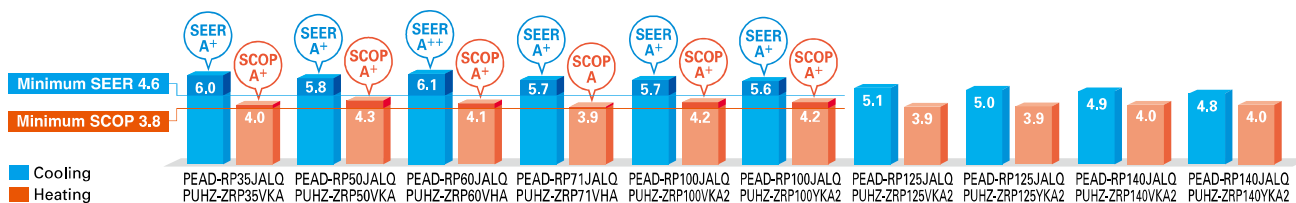

\* For products with capacity over 10.0kW, SEER/SCOP values are measured based on EN14825. These values are for reference purposes only.

## Drain Pump Option Available with All Models

The line-up consists of two types, models with or without a built-in drain pump.



PEAD-RP JAQ → Drain pump built-in



PEAD-RP JALQ → No drain pump

\* Units with an "L" included at the end of the model name are not equipped with a drain pump.

## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit



PEAD-RP35/50/60/71/100/125/140

#### Outdoor Unit

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140

For Multi  
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

#### Remote Controller



Optional



Optional



Optional

### Standard Inverter Series



#### Indoor Unit



PEAD-RP35/50/60/71/100/125/140

#### Outdoor Unit

For Single



SUZ-KA35



SUZ-KA50/60/71



PUHZ-P100



PUHZ-P125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-P100



PUHZ-P125/140



PUHZ-P200/250

#### Remote Controller



Optional



Optional



Optional

### PEAD-RP JA Indoor Unit Combinations Indoor unit combinations shown below are possible.

| Indoor Unit Combination        |                   | Outdoor Unit Capacity |      |      |      |       |       |       |     |     |             |      |      |             |       |             |            |      |              |               |      |
|--------------------------------|-------------------|-----------------------|------|------|------|-------|-------|-------|-----|-----|-------------|------|------|-------------|-------|-------------|------------|------|--------------|---------------|------|
|                                |                   | For Single            |      |      |      |       |       |       |     |     | For Twin    |      |      |             |       |             | For Triple |      |              | For Quadruple |      |
|                                |                   | 35                    | 50   | 60   | 71   | 100   | 125   | 140   | 200 | 250 | 71          | 100  | 125  | 140         | 200   | 250         | 140        | 200  | 250          | 200           | 250  |
| Power Inverter (PUHZ-ZRP)      |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | —   | —   | 35x2        | 50x2 | 60x2 | 71x2        | 100x2 | 125x2       | 50x3       | 60x3 | 71x3         | 50x4          | 60x4 |
|                                | Distribution Pipe | —                     | —    | —    | —    | —     | —     | —     | —   | —   | MSDD-50TR-E |      |      | MSDD-50WR-E |       | MSDT-111R-E |            |      | MSDF-1111R-E |               |      |
| Standard Inverter (PUHZ-P&SUZ) |                   | 35x1                  | 50x1 | 60x1 | 71x1 | 100x1 | 125x1 | 140x1 | —   | —   | —           | 50x2 | 60x2 | 71x2        | 100x2 | 125x2       | 50x3       | 60x3 | 71x3         | 50x4          | 60x4 |
|                                | Distribution Pipe | —                     | —    | —    | —    | —     | —     | —     | —   | —   | MSDD-50TR-E |      |      | MSDD-50WR-E |       | MSDT-111R-E |            |      | MSDF-1111R-E |               |      |

# PEDZ-RP JA SERIES

## POWER INVERTER



| Type                                 |                                   |                                 | Inverter Heat Pump                              |                 |                 |                 |                  |                   |                  |                   |                     |                 |                   |                     |      |  |
|--------------------------------------|-----------------------------------|---------------------------------|---|-----------------|-----------------|-----------------|------------------|-------------------|------------------|-------------------|---------------------|-----------------|-------------------|---------------------|------|--|
| Indoor Unit                          |                                   |                                 | PEAD-RP35JA(L)Q                                 | PEAD-RP50JA(L)Q | PEAD-RP60JA(L)Q | PEAD-RP71JA(L)Q | PEAD-RP100JA(L)Q |                   | PEAD-RP125JA(L)Q |                   | PEAD-RP140JA(L)Q    |                 |                   |                     |      |  |
| Outdoor Unit                         |                                   |                                 | PUHZ-ZRP35VKA                                   | PUHZ-ZRP50VKA   | PUHZ-ZRP60VHA   | PUHZ-ZRP71VHA   | PUHZ-ZRP100VKA2  | PUHZ-ZRP100YKA2   | PUHZ-ZRP125VKA2  | PUHZ-ZRP125YKA2   | PUHZ-ZRP140VKA2     | PUHZ-ZRP140YKA2 |                   |                     |      |  |
| Refrigerant                          |                                   |                                 | R410A*1   |                 |                 |                 |                  |                   |                  |                   |                     |                 |                   |                     |      |  |
| Power Supply                         |                                   |                                 | Outdoor power supply                            |                 |                 |                 |                  |                   |                  |                   |                     |                 |                   |                     |      |  |
|                                      |                                   |                                 | VKA・VHA:230 / Single / 50, YKA:400 / Three / 50 |                 |                 |                 |                  |                   |                  |                   |                     |                 |                   |                     |      |  |
| Cooling                              | Capacity                          |                                 | Rated   | kW              | 3.6             | 5.0             | 6.1              | 7.1               | 9.5              | 9.5               | 12.5                | 12.5            | 13.4              | 13.4                |      |  |
|                                      |                                   |                                 | Min・Max   | kW              | 1.6・4.5         | 2.3・5.6         | 2.7・6.7          | 3.3・8.1           | 4.9・11.4         | 4.9・11.4          | 5.5・14.0            | 5.5・14.0        | 6.2・15.3          | 6.2・15.3            |      |  |
|                                      | Total Input                       |                                 | Rated   | kW              | 0.89(0.87)      | 1.44(1.42)      | 1.65(1.63)       | 2.01(1.99)        | 2.43(2.41)       | 2.43(2.41)        | 3.86(3.83)          | 3.86(3.83)      | 4.32(4.29)        | 4.32(4.29)          |      |  |
|                                      | EER*1                             |                                 |   | —               | —               | —               | —                | —                 | —                | —                 | 3.24(3.26)          | 3.24(3.26)      | 3.10(3.12)        | 3.10(3.12)          |      |  |
|                                      | EEL Rank                          |                                 |   | —               | —               | —               | —                | —                 | —                | —                 | —                   | —               | —                 | —                   |      |  |
|                                      | Design Load                       |                                 | kW  | 3.6             | 5.0             | 6.1             | 7.1              | 9.5               | 9.5              | 12.5              | 12.5                | 13.4            | 13.4              |                     |      |  |
|                                      | Annual Electricity Consumption*2  |                                 | kWh/a   | 228(211)        | 317(301)        | 366(351)        | 446(428)         | 593(583)          | 602(592)         | 875(858)          | 886(873)            | 980(956)        | 991(976)          |                     |      |  |
|                                      | SEER*1                            |                                 |   | 5.6(6.0)        | 5.5(5.8)        | 5.6(5.7)        | 5.6(5.7)         | 5.6(5.7)          | 5.0(5.1)*4       | 4.9(5.0)*4        | 4.8(4.9)*4          | 4.7(4.8)*4      | 4.7(4.8)*4        |                     |      |  |
|                                      | Energy Efficiency Class           |                                 |   | A+ (A+)         | A(A+)           | A+ (A+)         | A+ (A+)          | A+ (A+)           | A(A+)            | —                 | —                   | —               | —                 | —                   |      |  |
|                                      | Heating (Average Season)          | Capacity                        |   | Rated           | kW              | 4.1             | 6.0              | 7.0               | 8.0              | 11.2              | 11.2                | 14.0            | 14.0              | 16.0                | 16.0 |  |
|                                      |                                   | Min・Max                         | kW  | 1.6・5.2         | 2.5・7.3         | 2.8・8.2         | 3.5・10.2         | 4.5・14.0          | 4.5・14.0         | 5.0・16.0          | 5.0・16.0            | 5.7・18.0        | 5.7・18.0          |                     |      |  |
| Total Input                          |                                   | Rated                           | kW  | 0.95            | 1.50            | 1.79            | 2.03             | 2.60              | 2.60             | 3.51              | 3.51                | 4.07            | 4.07              |                     |      |  |
| COP*1                                |                                   |                                 | —   | —               | —               | —               | —                | —                 | —                | 3.99              | 3.99                | 3.93            | 3.93              |                     |      |  |
| EEL Rank                             |                                   |                                 | —   | —               | —               | —               | —                | —                 | —                | —                 | —                   | —               | —                 |                     |      |  |
| Design Load                          |                                   | kW                              | 2.4   | 3.8             | 4.4             | 4.9             | 7.8              | 7.8               | 9.3              | 9.3               | 10.6                | 10.6            |                   |                     |      |  |
| Declared Capacity                    |                                   | at reference design temperature | kW  | 2.4(−10℃)       | 3.8(−10℃)       | 4.4(−10℃)       | 4.9(−10℃)        | 7.8(−10℃)         | 7.8(−10℃)        | 9.3(−10℃)         | 9.3(−10℃)           | 10.6(−10℃)      | 10.6(−10℃)        |                     |      |  |
|                                      |                                   | at bivalent temperature         | kW  | 2.4(−10℃)       | 3.8(−10℃)       | 4.4(−10℃)       | 4.9(−10℃)        | 7.8(−10℃)         | 7.8(−10℃)        | 9.3(−10℃)         | 9.3(−10℃)           | 10.6(−10℃)      | 10.6(−10℃)        |                     |      |  |
|                                      |                                   | at operation limit temperature  | kW  | 2.2(−11℃)       | 3.7(−11℃)       | 2.8(−20℃)       | 3.7(−20℃)        | 5.8(−20℃)         | 5.8(−20℃)        | 7.0(−20℃)         | 7.0(−20℃)           | 7.9(−20℃)       | 7.9(−20℃)         |                     |      |  |
| Back Up Heating Capacity             |                                   | kW                              | 0   | 0               | 0               | 0               | 0                | 0                 | 0                | 0                 | 0                   | 0               | 0                 |                     |      |  |
| Annual Electricity Consumption*2     |                                   |                                 | kWh/a   | 839             | 1231            | 1513            | 1762             | 2627              | 2627             | 3370              | 3370                | 3763            | 3763              |                     |      |  |
| SCOP*3                               |                                   |                                 |   | 4.0             | 4.3             | 4.1             | 3.9              | 4.2               | 4.2              | 3.9*4             | 3.9*4               | 4.0*4           | 4.0*4             |                     |      |  |
| Energy Efficiency Class              |                                   |                                 |   | A+              | A+              | A+              | A                | A+                | A+               | —                 | —                   | —               | —                 |                     |      |  |
| Operating Current (max)              |                                   |                                 | A   | 14.1            | 14.4            | 20.6            | 21.0             | 29.2              | 10.7             | 29.3              | 12.3                | 30.8            | 15.8              |                     |      |  |
| Indoor Unit                          | Input [Cooling / Heating]   Rated |                                 | kW  | 0.09(0.07)/0.07 | 0.11(0.09)/0.09 | 0.12(0.10)/0.10 | 0.17(0.15)/0.15  | 0.25(0.23)/0.23   | 0.25(0.23)/0.23  | 0.36(0.34)/0.34   | 0.36(0.34)/0.34     | 0.39(0.37)/0.37 | 0.39(0.37)/0.37   |                     |      |  |
|                                      | Operating Current (max)           |                                 | A   | 1.07            | 1.39            | 1.62            | 1.97             | 2.65              | 2.65             | 2.76              | 2.76                | 2.78            | 2.78              |                     |      |  |
|                                      | Dimensions <Panel>   H × W × D    |                                 | mm  | 250-900-732     |                 |                 | 250-1100-732     |                   |                  | 250-1400-732      |                     |                 | 250-1600-732      |                     |      |  |
|                                      | Weight <Panel>                    |                                 | kg  | 26(25)          |                 |                 | 33(32)           |                   |                  | 41(40)            |                     |                 | 43(42)            |                     |      |  |
|                                      | Air Volume [Lo-Mid-Hi]            |                                 | m³/min  | 10.0-12.0-14.0  |                 |                 | 12.0-14.5-17.0   |                   |                  | 14.5-18.0-21.0    |                     |                 | 17.5-21.0-25.0    |                     |      |  |
|                                      | External Static Pressure          |                                 | Pa  | 35              |                 |                 | 50               |                   |                  | 70                |                     |                 | 100 / 150         |                     |      |  |
|                                      | Sound Level (SPL) [Lo-Mid-Hi]     |                                 | dB(A)   | 23・27・30        |                 |                 | 26・31・35         |                   |                  | 25・29・33          |                     |                 | 26・30・34          |                     |      |  |
|                                      |                                   |                                 | dB(A)   | 52              |                 |                 | 57               |                   |                  | 55                |                     |                 | 58                |                     |      |  |
|                                      |                                   |                                 | dB(A)   | 630             |                 |                 | 809・300          |                   |                  | 943・950・330(4+30) |                     |                 | 943・950・330(4+30) |                     |      |  |
|                                      |                                   |                                 | dB(A)   | 61              |                 |                 | 61               |                   |                  | 61                |                     |                 | 61                |                     |      |  |
| Outdoor Unit                         | Dimensions                        |                                 | H × W × D                                       | mm              | 630・809・300     |                 |                  | 943・950・330(4+30) |                  |                   | 1338・1050・330(4+30) |                 |                   | 1338・1050・330(4+30) |      |  |
|                                      | Weight                            |                                 | kg  | 43              |                 |                 | 46               |                   |                  | 67                |                     |                 | 67                |                     |      |  |
|                                      | Air Volume                        |                                 | Cooling   | m³/min          | 45.0            |                 |                  | 45.0              |                  |                   | 55.0                |                 |                   | 55.0                |      |  |
|                                      |                                   |                                 | Heating   | m³/min          | 45.0            |                 |                  | 45.0              |                  |                   | 55.0                |                 |                   | 55.0                |      |  |
|                                      | Sound Level (SPL)                 |                                 | Cooling   | dB(A)           | 44              |                 |                  | 44                |                  |                   | 47                  |                 |                   | 47                  |      |  |
|                                      |                                   |                                 | Heating   | dB(A)           | 46              |                 |                  | 46                |                  |                   | 48                  |                 |                   | 48                  |      |  |
|                                      | Sound Level (PWL)                 |                                 | Cooling   | dB(A)           | 65              |                 |                  | 65                |                  |                   | 67                  |                 |                   | 67                  |      |  |
|                                      |                                   |                                 | Heating   | dB(A)           | 66              |                 |                  | 66                |                  |                   | 68                  |                 |                   | 68                  |      |  |
|                                      | Operating Current (max)           |                                 | A   | 13.0            |                 |                 | 13.0             |                   |                  | 19.0              |                     |                 | 19.0              |                     |      |  |
|                                      | Breaker Size                      |                                 | A   | 16              |                 |                 | 16               |                   |                  | 25                |                     |                 | 25                |                     |      |  |
| Ext. Piping                          | Diameter                          |                                 | Liquid / Gas                                    | mm              | 6.35 / 12.7     |                 |                  | 6.35 / 12.7       |                  |                   | 9.52 / 15.88        |                 |                   | 9.52 / 15.88        |      |  |
|                                      | Max. Length                       |                                 | Out-In  | m               | 50              |                 |                  | 50                |                  |                   | 50                  |                 |                   | 50                  |      |  |
|                                      | Max. Height                       |                                 | Out-In  | m               | 30              |                 |                  | 30                |                  |                   | 30                  |                 |                   | 30                  |      |  |
| Guaranteed Operating Range [Outdoor] |                                   |                                 | Cooling*3                                       | ℃               | -15 ~ +46       |                 |                  | -15 ~ +46         |                  |                   | -15 ~ +46           |                 |                   | -15 ~ +46           |      |  |
|                                      |                                   |                                 | Heating   | ℃               | -11 ~ +21       |                 |                  | -11 ~ +21         |                  |                   | -20 ~ +21           |                 |                   | -20 ~ +21           |      |  |

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO<sub>2</sub>, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.


\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C. \*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

\*5 EER/COP and SEER/SCOP for RP35~71 are measured at ESP 35Pa, for RP100 at ESP 37Pa, for RP125/140 at ESP 50Pa.

# PEDZ-P JA SERIES

## STANDARD INVERTER



| Type                                 |                                  |                                   | Inverter Heat Pump   |                          |                   |                   |                          |                   |                   |                          |                   |                   |                          |              |
|--------------------------------------|----------------------------------|-----------------------------------|--|--------------------------|-------------------|-------------------|--------------------------|-------------------|-------------------|--------------------------|-------------------|-------------------|--------------------------|--------------|
| Indoor Unit                          |                                  |                                   | PEAD-RP35JA(L)Q  | PEAD-RP50JA(L)Q          | PEAD-RP60JA(L)Q   | PEAD-RP71JA(L)Q   | PEAD-RP100JA(L)Q         |                   | PEAD-RP125JA(L)Q  |                          | PEAD-RP140JA(L)Q  |                   |                          |              |
| Outdoor Unit                         |                                  |                                   | SUZ-KA35VA4  | SUZ-KA50VA4              | SUZ-KA60VA4       | SUZ-KA71VA4       | PUHZ-P100VHA4            | PUHZ-P100YHA2     | PUHZ-P125VHA3     | PUHZ-P125YHA             | PUHZ-P140VHA3     | PUHZ-P140YHA      |                          |              |
| Refrigerant                          |                                  |                                   | R410A*1  |                          |                   |                   |                          |                   |                   |                          |                   |                   |                          |              |
| Power Supply                         |                                  |                                   | Outdoor power supply                                       |                          |                   |                   |                          |                   |                   |                          |                   |                   |                          |              |
| Cooling                              |                                  |                                   | VA4・VHA3・VHA4:230 / Single / 50, YHA・YHA2:400 / Three / 50 |                          |                   |                   |                          |                   |                   |                          |                   |                   |                          |              |
|                                      | Capacity                         | Rated                             | kW   | 3.6                      | 4.9               | 5.7               | 7.1                      | 9.4               | 9.4               | 12.3                     | 12.3              | 13.6              | 13.6                     |              |
|                                      |                                  | Min - Max                         | kW   | 1.4 - 3.9                | 2.3 - 5.6         | 2.3 - 6.3         | 2.8 - 8.1                | 4.9 - 11.2        | 4.9 - 11.2        | 5.5 - 14.0               | 5.5 - 14.0        | 5.5 - 15.0        | 5.5 - 15.0               |              |
|                                      | Total Input                      | Rated                             | kW   | 1.050 (1.030)            | 1.480 (1.460)     | 1.670 (1.650)     | 2.080 (2.060)            | 3.120 (3.102)     | 3.120 (3.102)     | 4.220 (4.200)            | 4.220 (4.200)     | 4.520 (4.500)     | 4.520 (4.500)            |              |
|                                      | EER**                            |                                   |  | —                        | —                 | —                 | —                        | —                 | —                 | 2.91 (2.93)              | 2.91 (2.93)       | 3.01 (3.02)       | 3.01 (3.02)              |              |
|                                      |                                  | EEL Rank                          |  | —                        | —                 | —                 | —                        | —                 | —                 | C                        | C                 | B                 | B                        |              |
|                                      | Design Load                      |                                   | kW   | 3.6                      | 4.9               | 5.7               | 7.1                      | 9.4               | 9.4               | —                        | —                 | —                 | —                        |              |
|                                      | Annual Electricity Consumption** |                                   | kWh/a  | 229 (213)                | 318 (301)         | 356 (340)         | 429 (413)                | 716 (694)         | 716 (694)         | —                        | —                 | —                 | —                        |              |
|                                      | SEER**                           |                                   |  | 5.5 (5.9)                | 5.4 (5.7)         | 5.6 (5.8)         | 5.8 (6.0)                | 4.6 (4.7)         | 4.6 (4.7)         | —                        | —                 | —                 | —                        |              |
|                                      |                                  | Energy Efficiency Class           |  | A (A+)                   | A (A+)            | A+ (A+)           | A+ (A+)                  | B                 | B                 | —                        | —                 | —                 | —                        |              |
|                                      | Capacity                         | Rated                             | kW   | 4.1                      | 5.9               | 7.0               | 8.0                      | 11.2              | 11.2              | 14.0                     | 14.0              | 16.0              | 16.0                     |              |
|                                      |                                  | Min - Max                         | kW   | 1.7 - 5.0                | 1.7 - 7.2         | 2.5 - 8.0         | 2.6 - 10.2               | 4.5 - 12.5        | 4.5 - 12.5        | 5.0 - 16.0               | 5.0 - 16.0        | 5.0 - 18.0        | 5.0 - 18.0               |              |
|                                      | Total Input                      | Rated                             | kW   | 1.110                    | 1.620             | 1.930             | 2.040                    | 3.103             | 3.103             | 3.870                    | 3.870             | 4.430             | 4.430                    |              |
|                                      | COP**                            |                                   |  | —                        | —                 | —                 | —                        | —                 | —                 | 3.62                     | 3.62              | 3.61              | 3.61                     |              |
|                                      |                                  | EEL Rank                          |  | —                        | —                 | —                 | —                        | —                 | —                 | A                        | A                 | A                 | A                        |              |
|                                      | Design Load                      |                                   | kW   | 2.8                      | 4.4               | 4.5               | 6.0                      | 8.0               | 8.0               | —                        | —                 | —                 | —                        |              |
|                                      | Declared Capacity                | at reference design temperature   | kW   | 2.5 (-10℃)               | 3.9 (-10℃)        | 4.0 (-10℃)        | 5.3 (-10℃)               | 6.3 (-10℃)        | 6.3 (-10℃)        | —                        | —                 | —                 | —                        |              |
|                                      |                                  | at bivalent temperature           | kW   | 2.5 (-7℃)                | 3.9 (-7℃)         | 4.0 (-7℃)         | 5.3 (-7℃)                | 7.1 (-7℃)         | 7.1 (-7℃)         | —                        | —                 | —                 | —                        |              |
|                                      |                                  | at operation limit temperature    | kW   | 2.5 (-10℃)               | 3.9 (-10℃)        | 4.0 (-10℃)        | 5.3 (-10℃)               | 5.0 (-15℃)        | 5.0 (-15℃)        | —                        | —                 | —                 | —                        |              |
|                                      | Back Up Heating Capacity         |                                   | kW   | 0.3                      | 0.5               | 0.5               | 0.7                      | 1.7               | 1.7               | —                        | —                 | —                 | —                        |              |
|                                      | Annual Electricity Consumption** |                                   | kWh/a  | 980                      | 1466              | 1574              | 2153                     | 2945              | 2945              | —                        | —                 | —                 | —                        |              |
|                                      | SCOP**                           |                                   |  | 4.0                      | 4.2               | 4.0               | 3.9                      | 3.8               | 3.8               | —                        | —                 | —                 | —                        |              |
|                                      |                                  | Energy Efficiency Class           |  | A+                       | A+                | A+                | A                        | A                 | A                 | —                        | —                 | —                 | —                        |              |
|                                      | Operating Current (max)          |                                   | A  | 9.3                      | 13.4              | 15.6              | 18.1                     | 30.7              | 15.7              | 30.8                     | 15.8              | 32.3              | 15.8                     |              |
|                                      |                                  | Input [Cooling / Heating]   Rated | kW   | 0.09(0.07) / 0.07        | 0.11(0.09) / 0.09 | 0.12(0.10) / 0.10 | 0.17(0.15) / 0.15        | 0.25(0.23) / 0.23 | 0.25(0.23) / 0.23 | 0.36(0.34) / 0.34        | 0.36(0.34) / 0.34 | 0.39(0.37) / 0.37 | 0.39(0.37) / 0.37        |              |
| Operating Current (max)              |                                  |                                   | A  | 1.07                     | 1.39              | 1.62              | 1.97                     | 2.65              | 2.65              | 2.76                     | 2.76              | 2.78              | 2.78                     |              |
| Dimensions <Panel>                   |                                  | H x W x D                         | mm   | 250-900-732              |                   |                   | 250-1100-732             |                   |                   | 250-1400-732             |                   |                   | 250-1600-732             |              |
| Weight <Panel>                       |                                  |                                   | kg   | 26 (25)                  |                   |                   | 33 (32)                  |                   |                   | 41 (40)                  |                   |                   | 47 (46)                  |              |
| Air Volume [Lo-Mid-Hi]               |                                  |                                   | m³/min   | 10.0 - 12.0 - 14.0       |                   |                   | 12.0 - 14.5 - 17.0       |                   |                   | 14.5 - 18.0 - 21.0       |                   |                   | 17.5 - 21.0 - 25.0       |              |
|                                      |                                  |                                   |  | 24.0 - 29.0 - 34.0       |                   |                   | 24.0 - 29.0 - 34.0       |                   |                   | 29.5 - 35.5 - 42.0       |                   |                   | 29.5 - 35.5 - 42.0       |              |
|                                      |                                  |                                   |  | 32.0 - 39.0 - 46.0       |                   |                   | 32.0 - 39.0 - 46.0       |                   |                   | 32.0 - 39.0 - 46.0       |                   |                   | 32.0 - 39.0 - 46.0       |              |
|                                      |                                  |                                   |  | 35 / 50 / 70 / 100 / 150 |                   |                   | 35 / 50 / 70 / 100 / 150 |                   |                   | 35 / 50 / 70 / 100 / 150 |                   |                   | 35 / 50 / 70 / 100 / 150 |              |
|                                      | External Static Pressure         |                                   | Pa   | 23 - 27 - 30             |                   |                   | 26 - 31 - 35             |                   |                   | 25 - 29 - 33             |                   |                   | 26 - 30 - 34             |              |
|                                      | Sound Level [SPL] [Lo-Mid-Hi]    |                                   | dB(A)  | 52                       |                   |                   | 57                       |                   |                   | 55                       |                   |                   | 58                       |              |
|                                      | Sound Level (PWL)                |                                   | dB(A)  | 60                       |                   |                   | 65                       |                   |                   | 61                       |                   |                   | 66                       |              |
|                                      | Dimensions                       | H x W x D                         | mm   | 550-800-285              |                   |                   | 550-800-285              |                   |                   | 880-840-330              |                   |                   | 880-840-330              |              |
|                                      | Weight                           |                                   | kg   | 35                       |                   |                   | 54                       |                   |                   | 50                       |                   |                   | 53                       |              |
|                                      | Air Volume                       | Cooling                           | m³/min   | 36.3                     |                   |                   | 44.6                     |                   |                   | 40.9                     |                   |                   | 50.1                     |              |
|                                      |                                  | Heating                           | m³/min   | 34.8                     |                   |                   | 44.6                     |                   |                   | 49.2                     |                   |                   | 60.0                     |              |
|                                      | Sound Level (SPL)                | Cooling                           | dB(A)  | 49                       |                   |                   | 52                       |                   |                   | 55                       |                   |                   | 59                       |              |
|                                      |                                  | Heating                           | dB(A)  | 50                       |                   |                   | 52                       |                   |                   | 55                       |                   |                   | 58                       |              |
|                                      | Sound Level (PWL)                | Cooling                           | dB(A)  | 62                       |                   |                   | 65                       |                   |                   | 69                       |                   |                   | 70                       |              |
|                                      | Operating Current (max)          |                                   | A  | 8.2                      |                   |                   | 12.0                     |                   |                   | 14.0                     |                   |                   | 16.1                     |              |
|                                      | Breaker Size                     |                                   | A  | 16                       |                   |                   | 20                       |                   |                   | 20                       |                   |                   | 32                       |              |
|                                      |                                  | Diameter                          | Liquid / Gas   | mm                       | 6.35 / 9.52       |                   |                          | 6.35 / 12.7       |                   |                          | 6.35 / 15.88      |                   |                          | 9.52 / 15.88 |
|                                      |                                  | Max. Length                       | Out-In   | m                        | 20                |                   |                          | 30                |                   |                          | 30                |                   |                          | 50           |
|                                      |                                  | Max. Height                       | Out-In   | m                        | 12                |                   |                          | 30                |                   |                          | 30                |                   |                          | 50           |
|                                      |                                  |                                   |  |                          | 12                |                   |                          | 30                |                   |                          | 30                |                   |                          | 50           |
| Guaranteed Operating Range [Outdoor] | Cooling                          | ℃                                 | -10 ~ +46  |                          |                   | -15 ~ +46         |                          |                   | -15 ~ +46         |                          |                   | -15 ~ +46*        |                          |              |
|                                      | Heating                          | ℃                                 | -10 ~ +24  |                          |                   | -10 ~ +24         |                          |                   | -10 ~ +24         |                          |                   | -15 ~ +21         |                          |              |



# PEA SERIES




PEA-RP200/250/400/500GAQ



For elegance and style, the PEA Series complements the room environment with an aesthetically pleasing ceiling installation and a vast line-up of performance functions. Long pipe work installation is supported, increasing freedom in the placement of indoor units.

## Flexible Duct Design Enables Use of High-pressure Static Fan

A flexible duct design and 150Pa external static high-pressure are incorporated. The increased variation in airflow options ensures operation that best matches virtually all room layouts.

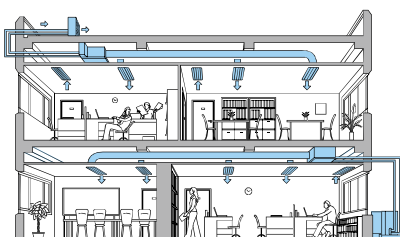

## Long Refrigerant Piping Length

With the addition of more refrigerant, the maximum length for refrigerant piping has been increased to 100 metres. As a result, it is much easier to create the optimum layout for unit installation.

|        |     | Power Inverter Connection |             | Standard Inverter Connection |             |
|--------|-----|---------------------------|-------------|------------------------------|-------------|
|        |     | Max. Length               | Max. Height | Max. Length                  | Max. Height |
| PEA-RP | 200 | 100m                      | 30m         | 70m                          | 30m         |
|        | 250 | 100m                      | 30m         | 70m                          | 30m         |
|        | 400 | 100m                      | 30m         | 70m                          | 30m         |
|        | 500 | 100m                      | 30m         | 70m                          | 30m         |


## Wide-ranging Line-up from 20–50kW – Extensive Array of Choices to Match Building Size

### [System Image]


PEA-RP200/250GAQ




• For PEA-200, 250

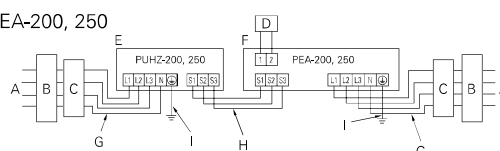

PEA-RP400/500GAQ

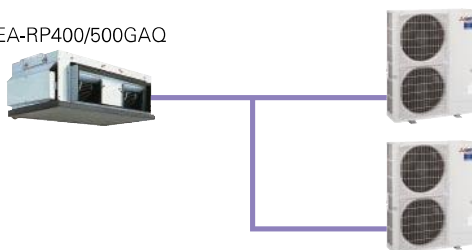

• For PEA-400, 500

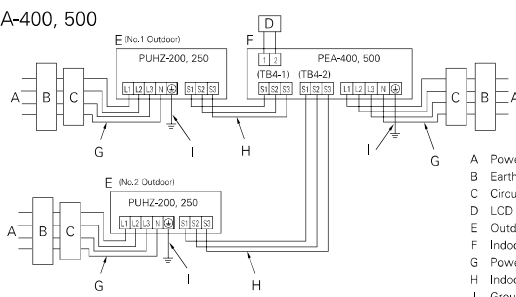


- A Power supply
- B Earth leakage breaker
- C Circuit breaker or local switch
- D LCD remote controller
- E Outdoor unit
- F Indoor unit
- G Power cable wiring
- H Indoor/Outdoor connection wiring
- I Grounding

## PAR-31MAA Group Control

The PAR-31MAA remote controller can control up to 16 systems\* as a group, and is ideal for supporting the integrated management of building air conditioners.

\*Count each set of PEA-RP400 and PEA-RP500 as two systems as two outdoor units are connected.

• For PEA-200, 250



- A Outdoor unit
- B Indoor unit
- C Main remote controller
- D Subordinate remote controller
- E Standard (Refrigerant address = 00)
- F Refrigerant address = 01
- G Refrigerant address = 02
- H Refrigerant address = 15

## LINE-UP

### Indoor Unit



PEA-RP200/250/400/500GAQ

### Outdoor Unit

\* Two units are used when connecting PEA-RP400/500GAQ.

#### Power Inverter Series

PUHZ-ZRP200/250



#### Standard Inverter Series

PUHZ-P200/250



### Remote Controller



Optional



Optional

# PEZ-RP SERIES

## POWER INVERTER



| Type                                |                               |              |            | Inverter Heat Pump   |                        |                    |                    |
|-------------------------------------|-------------------------------|--------------|------------|----------------------|------------------------|--------------------|--------------------|
| Indoor Unit                         |                               |              |            | PEA-RP200GAQ         | PEA-RP250GAQ           | PEA-RP400GAQ       | PEA-RP500GAQ       |
| Outdoor Unit                        |                               |              |            | PUHZ-ZRP200YKA       | PUHZ-ZRP250YKA         | PUHZ-ZRP200YKA x 2 | PUHZ-ZRP250YKA x 2 |
| Refrigerant                         |                               |              |            | R410A*1              |                        |                    |                    |
| Power Supply                        | Source                        |              |            | Outdoor power supply |                        |                    |                    |
|                                     | Outdoor (V/Phase/Hz)          |              |            | 400 / Three / 50     |                        |                    |                    |
| Cooling                             | Capacity                      | Rated        | kW         | 19.0                 | 22.0                   | 38.0               | 44.0               |
|                                     |                               | Min - Max    | kW         | 9.0 - 22.4           | 11.2 - 27.0            | 18.0 - 44.8        | 22.4 - 54.0        |
|                                     | Total Input                   | Rated        | kW         | 6.46                 | 8.31                   | 12.47              | 17.10              |
|                                     | EER                           |              |            | 2.94                 | 2.65                   | 3.05               | 2.57               |
|                                     | EEL Rank                      |              |            | -                    | -                      | -                  | -                  |
| Heating (Average Season)            | Capacity                      | Rated        | kW         | 22.4                 | 27.0                   | 44.8               | 54.0               |
|                                     |                               | Min - Max    | kW         | 9.5 - 25.0           | 12.5 - 31.0            | 18.0 - 50.0        | 25.0 - 62.0        |
|                                     | Total Input                   | Rated        | kW         | 6.94                 | 8.94                   | 13.43              | 18.36              |
|                                     | COP                           |              |            | 3.23                 | 3.02                   | 3.34               | 2.94               |
|                                     | EEL Rank                      |              |            | -                    | -                      | -                  | -                  |
| Operating Current (max)             |                               |              |            | 21.0                 | 23.3                   | 41.8               | 47.4               |
| Indoor Unit                         | Input (Cooling / Heating)     | Rated        | kW         | 1.000                | 1.180                  | 1.550              | 2.840              |
|                                     | Operating Current (max)       |              | A          | 2.0                  | 2.3                    | 3.8                | 5.4                |
|                                     | Dimensions                    | H x W x D    | mm         | 400 - 1400 - 634     | 400 - 1600 - 634       | 595 - 1947 - 764   |                    |
|                                     | Weight                        |              | kg         | 70                   | 77                     | 130                | 133                |
|                                     | Air Volume (Lo-Mid-Hi)        |              | m³/min     | 52.0 - 65.0          | 64.0 - 80.0            | 120.0              | 160.0              |
|                                     | External Static Pressure      |              | Pa         | 150                  | 150                    | 150                | 150                |
|                                     | Sound Level (SPL) (Lo-Mid-Hi) |              | dB(A)      | 48 - 51              | 49 - 52                | 52*2               | 53*2               |
|                                     | Sound Level (PWL)             |              | dB(A)      | 15                   | 15                     | 15                 | 15                 |
|                                     | Dimensions                    |              | H x W x D  | mm                   | 1338 - 1050 - 330(+40) |                    |                    |
|                                     | Weight                        |              | kg         | 135                  | 135                    | 135                | 135                |
| Outdoor Unit                        | Air Volume                    | Cooling      | m³/min     | 140                  | 140                    | 140                | 140                |
|                                     |                               | Heating      | m³/min     | 140                  | 140                    | 140                | 140                |
|                                     | Sound Level (SPL)             | Cooling      | dB(A)      | 59                   | 59                     | 59                 | 59                 |
|                                     |                               | Heating      | dB(A)      | 62                   | 62                     | 62                 | 62                 |
|                                     | Sound Level (PWL)             | Cooling      | dB(A)      | 77                   | 77                     | 77                 | 77                 |
|                                     |                               | Heating      | dB(A)      | 77                   | 77                     | 77                 | 77                 |
|                                     | Operating Current (max)       |              | A          | 19.0                 | 21.0                   | 19.0               | 21.0               |
|                                     | Breaker Size                  |              | A          | 32                   | 32                     | 32                 | 32                 |
| Ext. Piping                         | Diameter                      | Liquid / Gas | mm         | 9.52 / 25.4          | 12.7 / 25.4            | 9.52 / 25.4        | 12.7 / 25.4        |
|                                     | Max. Length                   | Out-In       | m          | 100                  | 100                    | 100                | 100                |
|                                     | Max. Height                   | Out-In       | m          | 30                   | 30                     | 30                 | 30                 |
| Guaranteed Operating Range (Outdoor |                               |              | Cooling *3 | °C                   | -15 ~ +46              | -15 ~ +46          | -15 ~ +46          |
|                                     |                               |              | Heating    | °C                   | -20 ~ +21              | -20 ~ +21          | -20 ~ +21          |

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1375. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

\*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

# PEZ-P SERIES

## STANDARD INVERTER



| Type                     |                               |                                      |           | Inverter Heat Pump     |                  |                        |                  |
|--------------------------|-------------------------------|--------------------------------------|-----------|------------------------|------------------|------------------------|------------------|
| Indoor Unit              |                               |                                      |           | PEA-RP200GAQ           | PEA-RP250GAQ     | PEA-RP400GAQ           | PEA-RP500GAQ     |
| Outdoor Unit             |                               |                                      |           | PUHZ-P200YKA           | PUHZ-P250YKA     | PUHZ-P200YKA x 2       | PUHZ-P250YKA x 2 |
| Refrigerant              |                               |                                      |           | R410A*1                |                  |                        |                  |
| Power Supply             | Source                        |                                      |           | Outdoor power supply   |                  |                        |                  |
|                          | Outdoor (V/Phase/Hz)          |                                      |           | 400 / Three / 50       |                  |                        |                  |
| Cooling                  | Capacity                      | Rated                                | kW        | 19.0                   | 22.0             | 38.0                   | 44.0             |
|                          |                               | Min - Max                            | kW        | 9.0 - 22.4             | 11.2 - 27.0      | 18.0 - 44.8            | 22.4 - 54.0      |
|                          | Total Input                   | Rated                                | kW        | 6.64                   | 8.71             | 12.83                  | 17.90            |
|                          | EER                           |                                      |           | 2.86                   | 2.53             | 2.96                   | 2.46             |
|                          |                               | EEL Rank                             |           | —                      | —                | —                      | —                |
| Heating (Average Season) | Capacity                      | Rated                                | kW        | 22.4                   | 27.0             | 44.8                   | 54.0             |
|                          |                               | Min - Max                            | kW        | 9.5 - 25.0             | 12.5 - 31.0      | 18.0 - 50.0            | 25.0 - 62.0      |
|                          | Total Input                   | Rated                                | kW        | 7.10                   | 9.31             | 13.75                  | 19.10            |
|                          | COP                           |                                      |           | 3.15                   | 2.90             | 3.26                   | 2.83             |
|                          |                               | EEL Rank                             |           | —                      | —                | —                      | —                |
| Operating Current (max)  |                               |                                      |           | 21.0                   | 23.3             | 41.8                   | 47.4             |
| Indoor Unit              | Input [Cooling / Heating]     | Rated                                | kW        | 1.000                  | 1.180            | 1.550                  | 2.840            |
|                          | Operating Current (max)       |                                      | A         | 2.0                    | 2.3              | 3.8                    | 5.4              |
|                          | Dimensions                    | H x W x D                            | mm        | 400 - 1400 - 634       | 400 - 1600 - 634 | 595 - 1947 - 764       |                  |
|                          | Weight                        |                                      | kg        | 70                     | 77               | 130                    | 133              |
|                          | Air Volume [Lo-Mid-Hi]        |                                      | m³/min    | 52.0 - 65.0            | 64.0 - 80.0      | 120.0                  | 160.0            |
|                          | External Static Pressure      |                                      | Pa        | 150                    | 150              | 150                    | 150              |
|                          | Sound Level (SPL) [Lo-Mid-Hi] |                                      | dB(A)     | 48 - 51                | 49 - 52          | 52*2                   | 53*2             |
|                          | Sound Level (PWL)             |                                      | dB(A)     | 15                     | 15               | 15                     | 15               |
| Outdoor Unit             | Dimensions                    | H x W x D                            | mm        | 1338 - 1050 - 330(+40) |                  | 1338 - 1050 - 330(+40) |                  |
|                          | Weight                        |                                      | kg        | 127                    | 135              | 127                    | 135              |
|                          | Air Volume                    | Cooling                              | m³/min    | 140                    | 140              | 140                    | 140              |
|                          |                               | Heating                              | m³/min    | 140                    | 140              | 140                    | 140              |
|                          | Sound Level (SPL)             | Cooling                              | dB(A)     | 58                     | 59               | 58                     | 59               |
|                          |                               | Heating                              | dB(A)     | 60                     | 62               | 60                     | 62               |
|                          | Sound Level (PWL)             | Cooling                              | dB(A)     | 78                     | 77               | 78                     | 77               |
|                          |                               | Heating                              | dB(A)     | 78                     | 77               | 78                     | 77               |
|                          | Operating Current (max)       |                                      | A         | 19.0                   | 21.0             | 19.0                   | 21.0             |
|                          | Breaker Size                  |                                      | A         | 32                     | 32               | 32                     | 32               |
| Ext. Piping              | Diameter                      | Liquid / Gas                         | mm        | 9.52 / 25.4            | 12.7 / 25.4      | 9.52 / 25.4            | 12.7 / 25.4      |
|                          | Max. Length                   | Out-In                               | m         | 70                     | 70               | 70                     | 70               |
|                          | Max. Height                   | Out-In                               | m         | 30                     | 30               | 30                     | 30               |
|                          |                               | Guaranteed Operating Range [Outdoor] | Cooling*3 | °C                     | -15 ~ +46        | -15 ~ +46              | -15 ~ +46        |
|                          |                               | Heating                              | °C        | -20 ~ +21              | -20 ~ +21        | -20 ~ +21              | -20 ~ +21        |

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1375. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

\*4 SEER/SCOP values are measured based on EN14825. These values are reference purpose only.